



SPECIFICATION SHEET  
03SEHS24MGB

DESCRIPTION:  
**3" PERFORATED STAMPED GRATE**

WRITTEN SPECIFICATION:

Grating shall be 03SEHS24MGB heel proof and ADA compliant galvanized steel perforated grate. The perforations shall be no more than 1/4" diameter making the grate heel proof and compliant with the requirements of the Americans with Disabilities Act handbook section 4.5.4. The grate shall be made of 14 ga, A-36 steel. The grate shall be 2.875" wide x 24" long x 0.5" thick and have a minimum load rating of DIN Class B (Exceeds H-20).

PRODUCT DATA

MATERIAL:	T304 STAINLESS STEEL
FINISH:	POLISHED
ADA COMPLIANT:	YES
HEEL PROOF:	YES
LOCKING DEVICE:	CLIPLOCK
WEIGHT (LB):	2.1
OPEN AREA (IN²/LF):	5.2

LOAD RATINGS





DIN / EN1433:	CLASS B
AASHTO:	EXCEEDS H-20
ASME:	LIGHT DUTY
FAA:	NO
LOAD CAPACITY:	580 PSI

PHONE: 770-505-6575	MODEL BY:	LRC
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132	DRAWING BY:	EV
	REVIEWED BY:	LRC
222 WEST 33RD ST. OGDEN, UT 84401	DATE:	02/01/2024
13300 RAMBLEWOOD DR. CHESTER, VA 23836	SCALE:	1 : 3
	REV # :	IC-1

WWW.DURATRENCH.COM

NOTES

1. GRATES MAY BE MANUFACTURED TO REQUIRED RADII

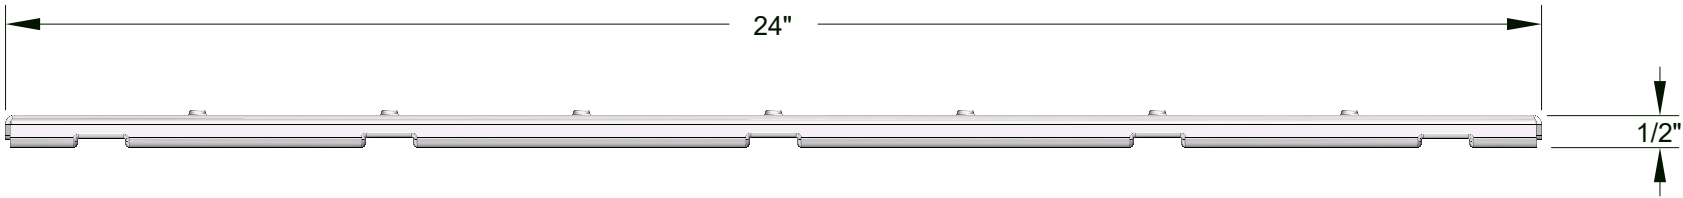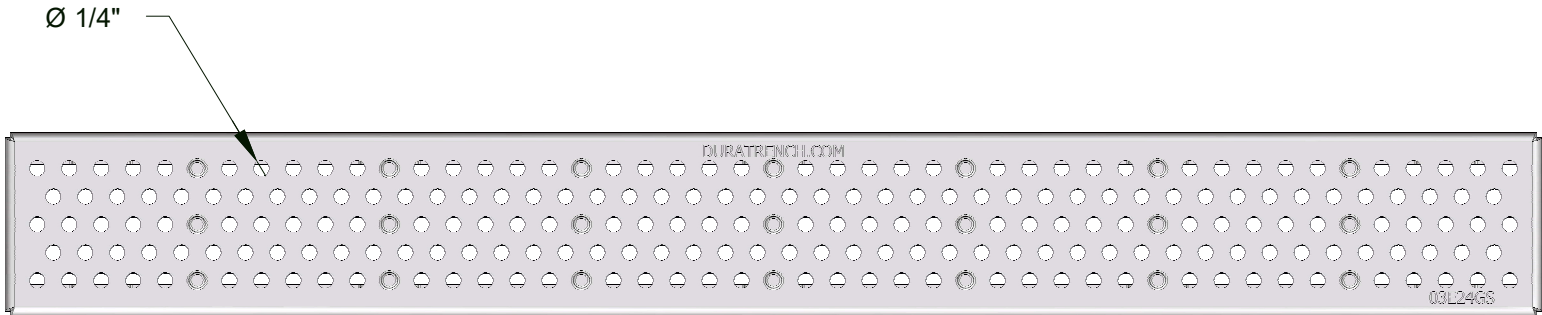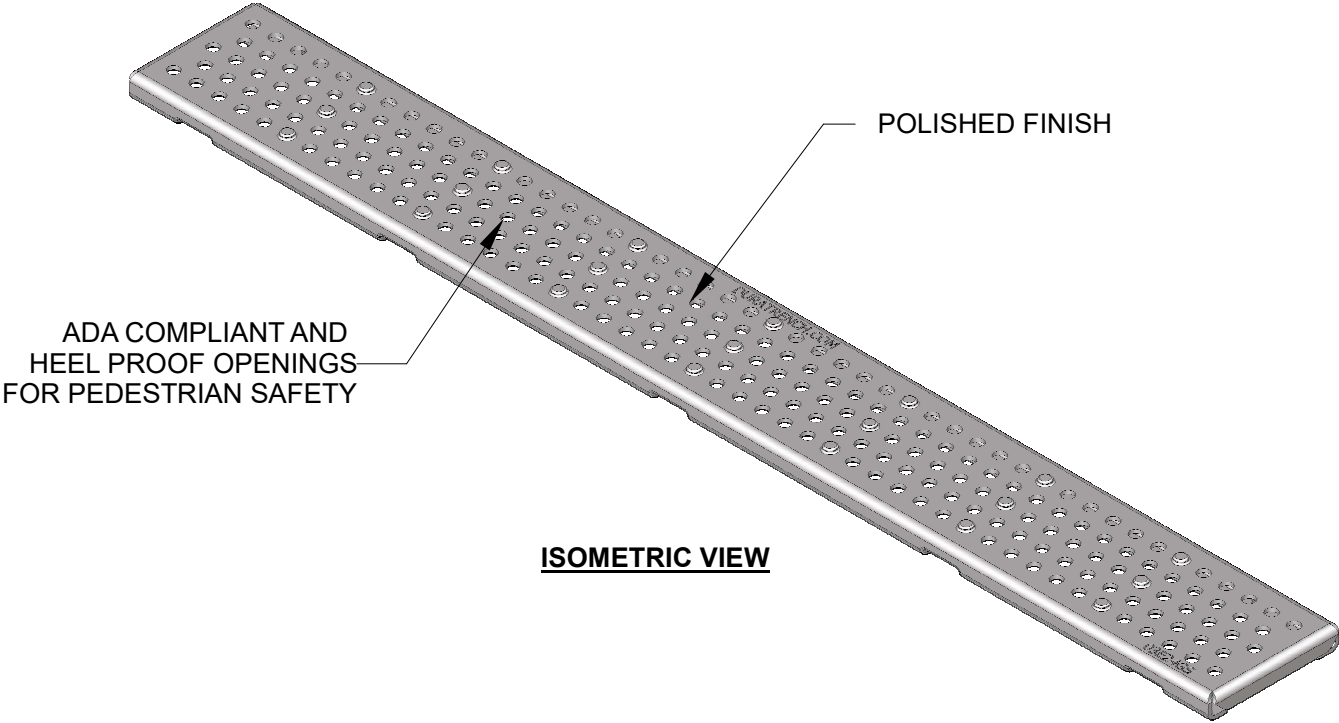

TOLERANCES

.X = ±0.1  
.XX = ±0.04  
.XXX = ±0.004  
FRACTIONAL = ± 1/16"  
ANGULAR = ± 0.5°