




SPECIFICATION SHEET
03SLHM24TGA

DESCRIPTION:
3" LIGHT GRAY THERMOPLASTIC
LONGITUDINALLY SLOTTED GRATE


WRITTEN SPECIFICATION:

Grating shall be 03SLHM24TGA plastic grate. The grate shall be made of light gray thermal plastic with UV inhibitors. The grate shall be heel proof having openings less than 5/16" wide suitable for pedestrian traffic. The grate complies with the requirements of the Americans with Disabilities Act handbook section 4.5.4. The grate shall be 2 7/8" wide x 24" long x 1/2" thick and have a minimum load rating of DIN Class A.


- NOTES
- 1. GRATES MAY BE MANUFACTURED TO REQUIRED RADII
 - 2. ADA COMPLIANCE DEPENDENT UPON DIRECTION OF TRAVEL

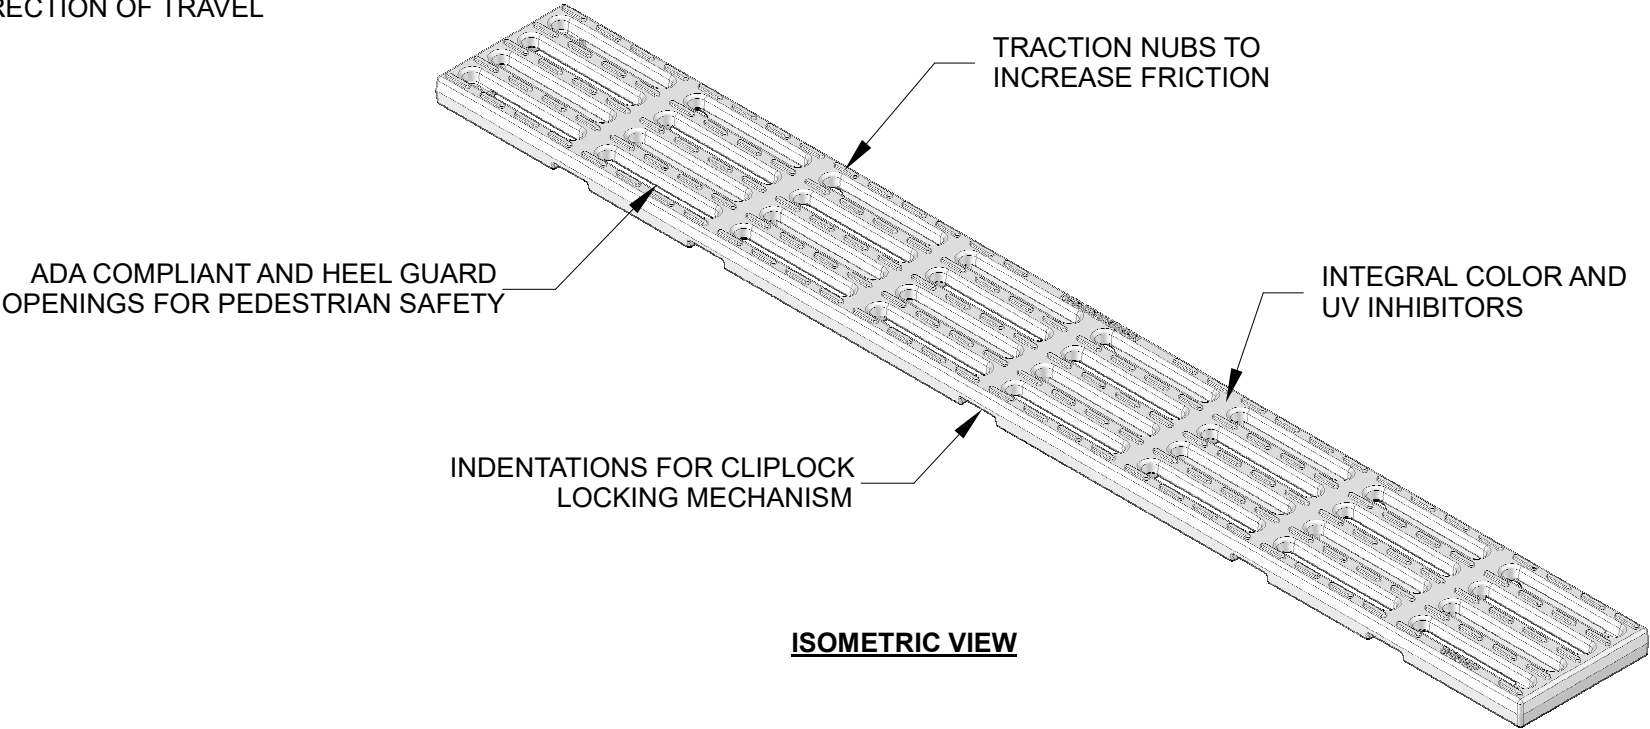


ISOMETRIC VIEW

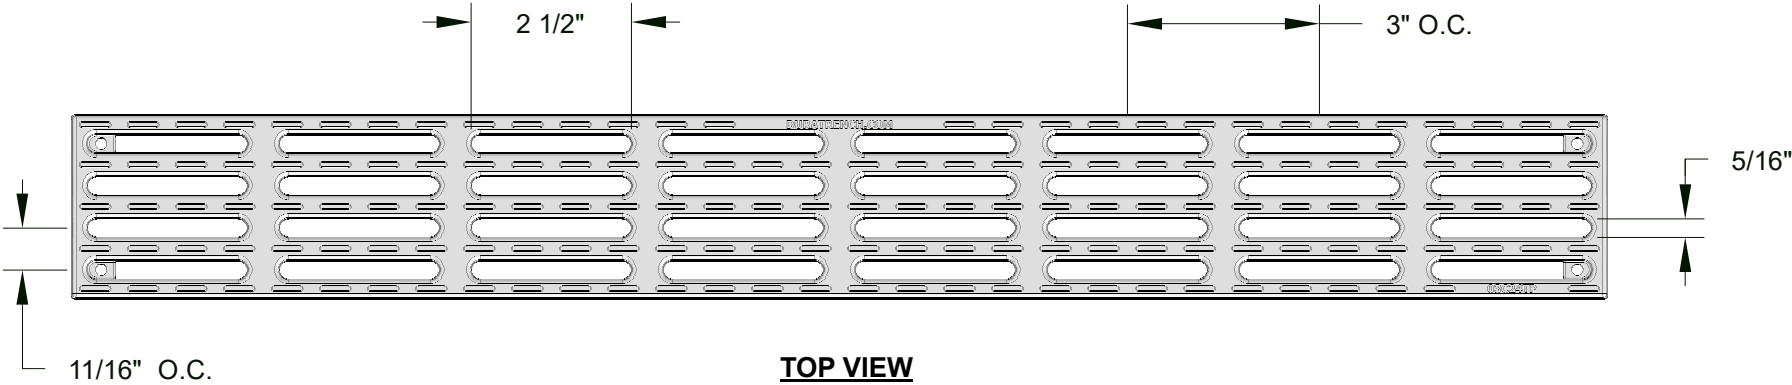

TOP VIEW

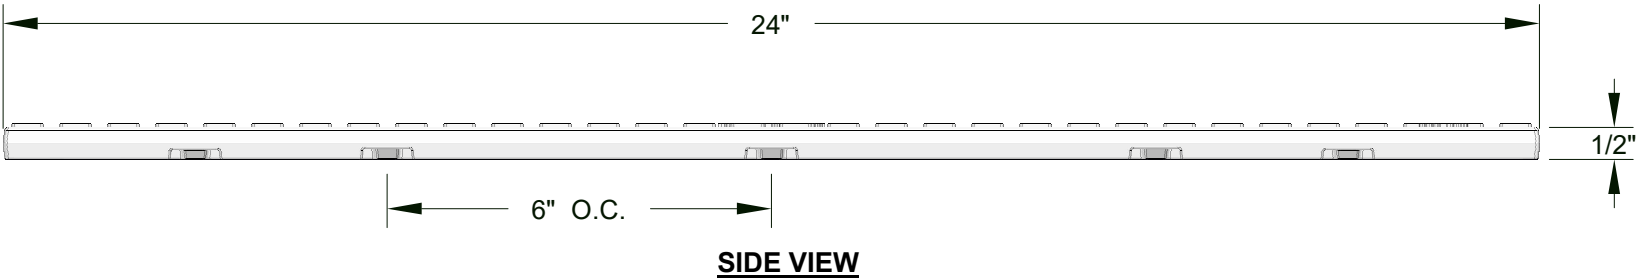

SIDE VIEW

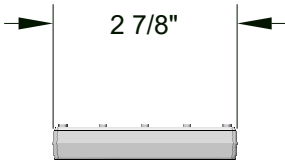

END VIEW

PRODUCT DATA	
MATERIAL:	NYLON 6/30
COLOR:	LIGHT GRAY
ADA COMPLIANT:	YES
HEEL PROOF:	YES
LOCKING DEVICE:	CLIPLOCK
WEIGHT (LB):	0.7
OPEN AREA (IN²/LF):	12.2
LOAD RATINGS	
DIN / EN1433:	CLASS A
AASHTO:	NO
ASME:	NO
FAA:	NO
LOAD CAPACITY:	70 PSI
PHONE: 770-505-6575	MODEL BY: LRC
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132 222 WEST 33RD ST. OGDEN, UT 84401 13300 RAMBLEWOOD DR. CHESTER, VA 23836	DRAWING BY: EV
	REVIEWED BY: LRC
	DATE: 02/01/2024
	SCALE: 1 : 3
	REV # : IC-0

WWW.DURATRENCH.COM

TOLERANCES
.X = ±0.1
.XX = ±0.04
.XXX = ±0.004
FRACTIONAL = ± 1/16"
ANGULAR = ± 0.5°