



SPECIFICATION SHEET
05SEHS24MGA

DESCRIPTION:

5" GALVANIZED PERFORATED GRATE

WRITTEN SPECIFICATION:

Grating shall be 05SEHS24MGA heel proof and ADA compliant galvanized steel perforated grate. The perforations shall be no more than 1/4" diameter making the grate heel proof and compliant with the requirements of the Americans with Disabilities Act handbook section 4.5.4. The grate shall be made of 12 ga galvanized steel per ASTM A-123. The grate shall be 4.875" wide x 24" long x 0.75" thick and have a minimum load rating of DIN Class A.

PRODUCT DATA

MATERIAL:	STEEL PER ASTM A36
FINISH:	GALVANIZED
ADA COMPLIANT:	YES
HEEL PROOF:	YES
LOCKING DEVICE:	CLIPLOCK
WEIGHT (LB):	4.0
OPEN AREA (IN²/LF):	9.3





LOAD RATINGS

DIN / EN1433:	CLASS A
AASHTO:	NO
ASME:	NO
FAA:	NO
LOAD CAPACITY:	70 PSI

PHONE: 770-505-6575	MODEL BY:	LRC
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132	DRAWING BY:	EV
	REVIEWED BY:	LRC
222 WEST 33RD ST. OGDEN, UT 84401	DATE:	02/01/2024
13300 RAMBLEWOOD DR. CHESTER, VA 23836	SCALE:	1 : 3
	REV # :	IC-0

WWW.DURATRENCH.COM

NOTES
1. GRATES MAY BE MANUFACTURED TO REQUIRED RADII

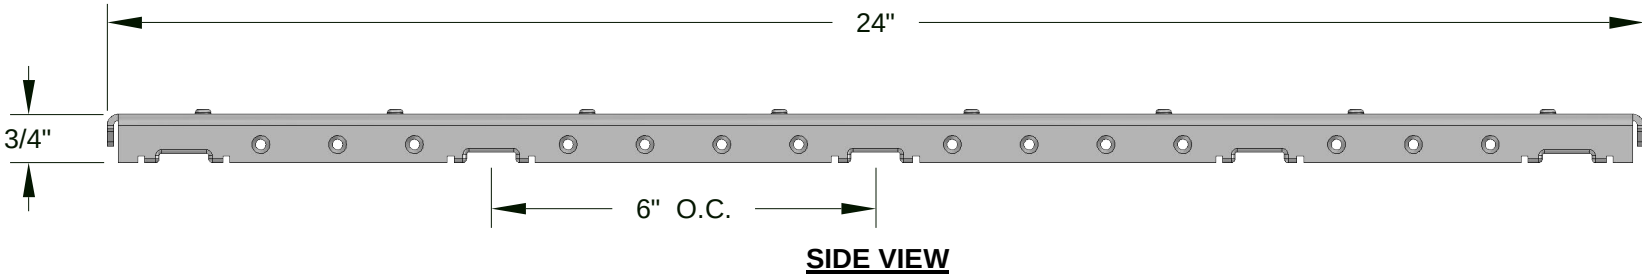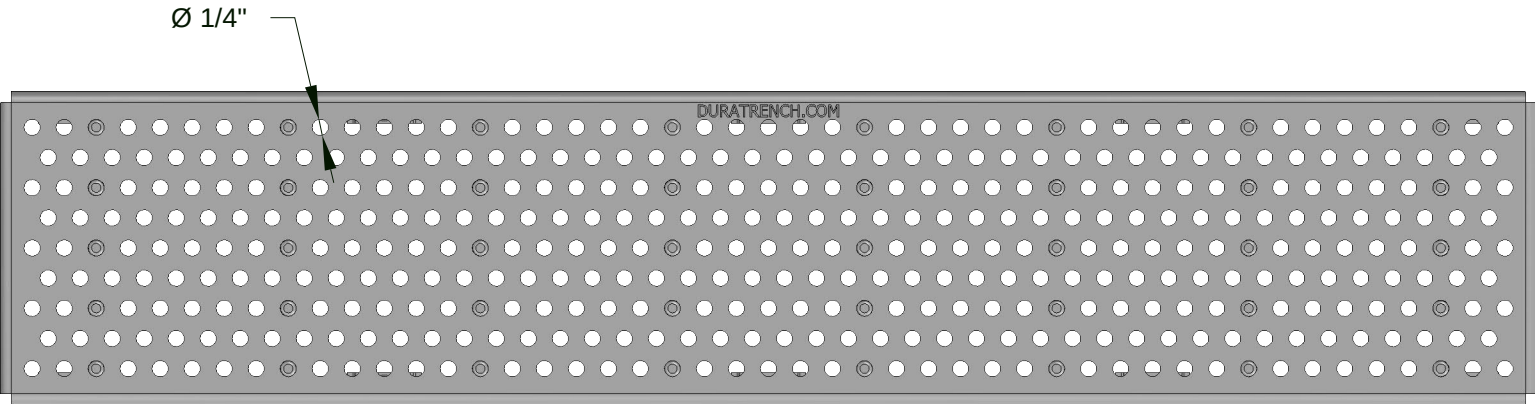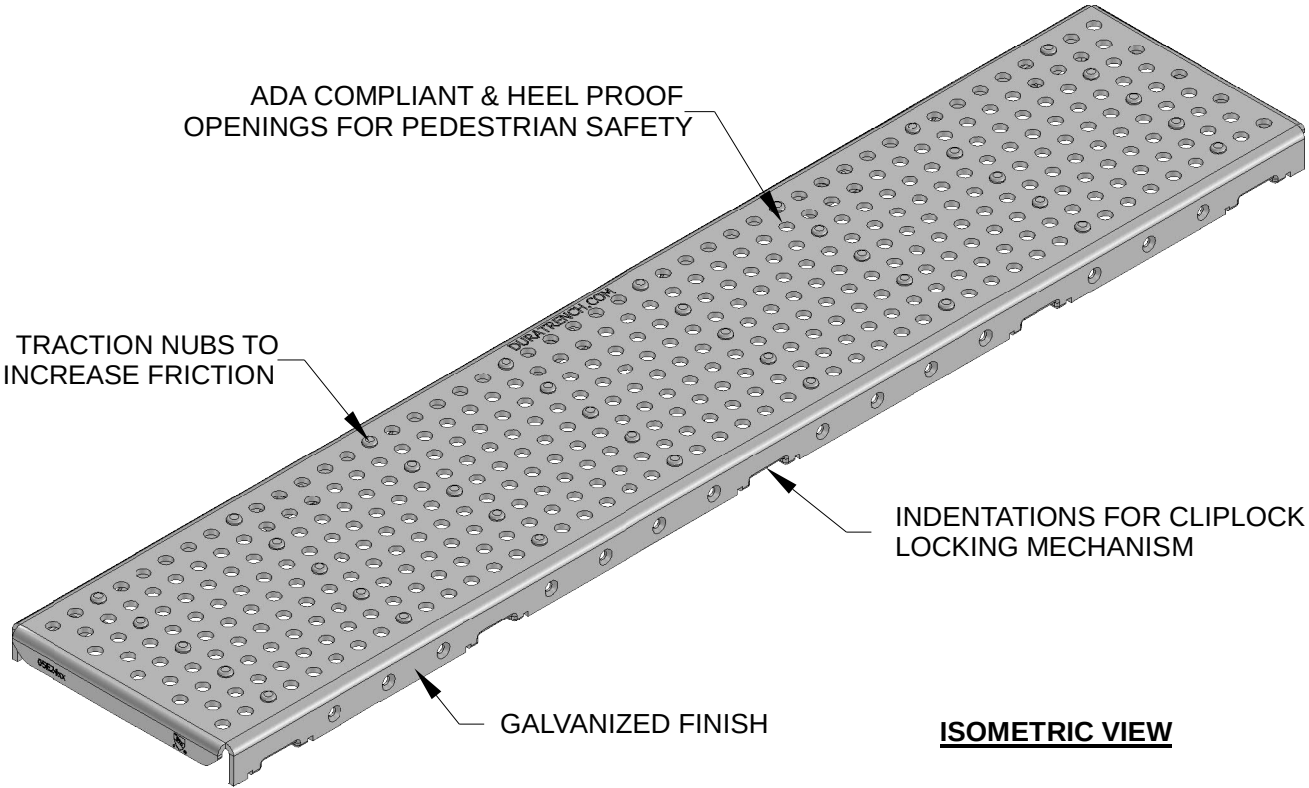

TOLERANCES
.X = ±0.1
.XX = ±0.04
.XXX = ±0.004
FRACTIONAL = ± 1/16"
ANGULAR = ± 0.5°