



SPECIFICATION SHEET
08SEHF24SSB

DESCRIPTION:

8" PERFORATED STAINLESS STEEL GRATE

WRITTEN SPECIFICATION:

Grating shall be 08SEHF24SSB reinforced heel proof and ADA compliant stainless steel perforated grate. The perforations shall be no more than 1/4" diameter making the grate heel proof and compliant with the requirements of the Americans with Disabilities Act handbook section 4.5.4. The grate shall be made of T304 stainless steel per ASTM A-240 and shall have reinforcing ribs affixed to the under side of the grate for added strength. The grate shall be 8" wide x 24" long x 1.5" thick and have a minimum load rating of DIN Class B(exceeds H-20).

PRODUCT DATA

MATERIAL:	T304 STAINLESS STEEL
FINISH:	BEAD BLAST
ADA COMPLIANT:	YES
HEEL PROOF:	YES
LOCKING DEVICE:	CLIPLOCK
WEIGHT (LB):	14.8
OPEN AREA (IN²/LF):	26


LOAD RATINGS

DIN / EN1433:	CLASS B
AASHTO:	EXCEEDS H-20
ASME:	LIGHT DUTY
FAA:	NO
LOAD CAPACITY:	589 PSI


PHONE: 770-505-6575	MODEL BY:	LRC
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132	DRAWING BY:	EV
222 WEST 33RD ST. OGDEN, UT 84401	REVIEWED BY:	LRC
13300 RAMBLEWOOD DR. CHESTER, VA 23836	DATE:	07/05/2024
	SCALE:	1 : 3
	REV # :	IC-0

WWW.DURATRENCH.COM


NOTES
1. GRATES MAY BE MANUFACTURED TO REQUIRED RADII

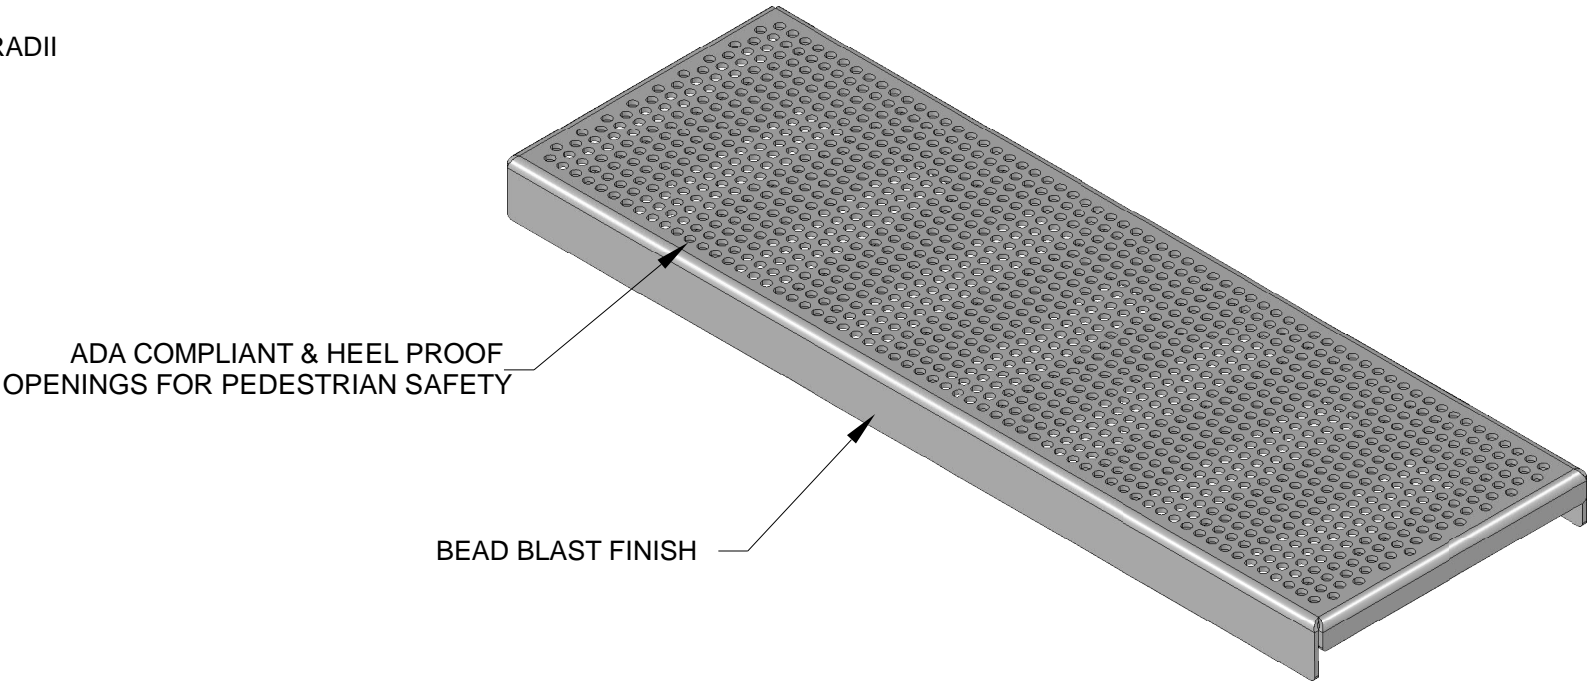


ISOMETRIC VIEW

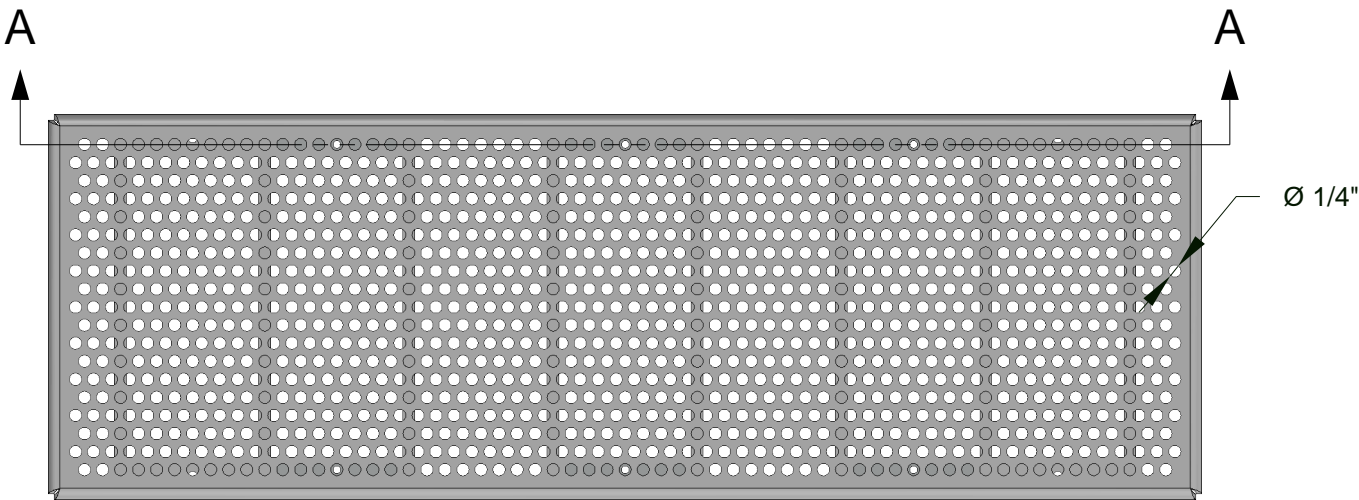


TOP VIEW

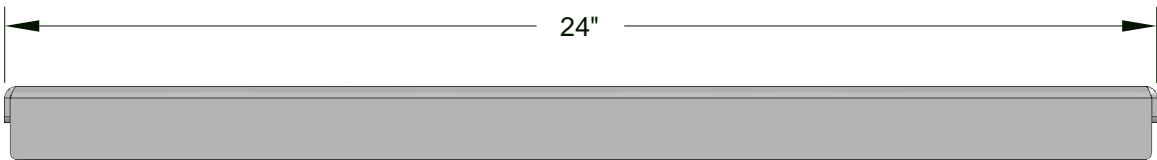

SIDE VIEW

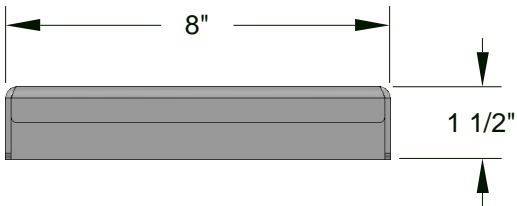

END VIEW

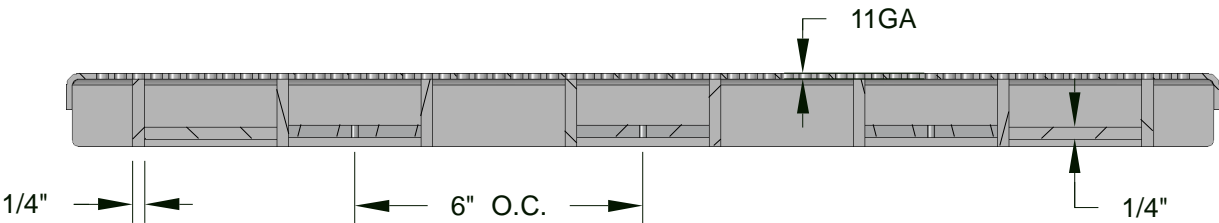

SECTION A-A

TOLERANCES
.X = ±0.1
.XX = ±0.04
.XXX = ±0.004
FRACTIONAL = ± 1/16"
ANGULAR = ± 0.5°