



SPECIFICATION SHEET
08SLHF24SSF

DESCRIPTION: **8" LONGITUDINALLY SLOTTED**
STAINLESS STEEL GRATE

WRITTEN SPECIFICATION:

Grating shall be 08SLHF24SSF, as manufactured by Eric'sons, 296 Industrial Blvd. N., Dallas, GA 30132, (770) 505-6575. Grating shall have ADA compliant and heel proof longitudinal slots. The grate shall be fabricated of grade T304 stainless steel per ASTM A-240. The gratesurface shall have a bead blast finish. The grate shall be 8" wide x 24" long x 2 1/4" thick with 1 1/2" grate seat height and have a minimum load rating of DIN Class F (exceeds H-20/HS-25).

PRODUCT DATA

MATERIAL:	T304 STAINLESS STEEL
FINISH:	BEAD BLAST
ADA COMPLIANT:	YES
HEEL PROOF:	YES
LOCKING DEVICE:	CLIPLOCK
WEIGHT (LB):	42.3
OPEN AREA (IN²/LF):	12.4

LOAD RATINGS



DIN / EN1433:	CLASS F
AASHTO:	EXCEEDS M-306, H-20, & HS-25
ASME:	EXTRA HEAVY DUTY
FAA:	YES
LOAD CAPACITY:	4,244 PSI

PHONE: 770-505-6575	MODEL BY:	LRC
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132 222 WEST 33RD ST. OGDEN, UT 84401 13300 RAMBLEWOOD DR. CHESTER, VA 23836	DRAWING BY:	EV
	REVIEWED BY:	LRC
	DATE:	07/18/2024
	SCALE:	1 : 3.5
REV # :		IC-0


WWW.DURATRENCH.COM

NOTES


1. GRATES MAY BE MANUFACTURED TO REQUIRED RADII
2. ADA COMPLIANCE DEPENDS ON DIRECTION OF TRAVEL

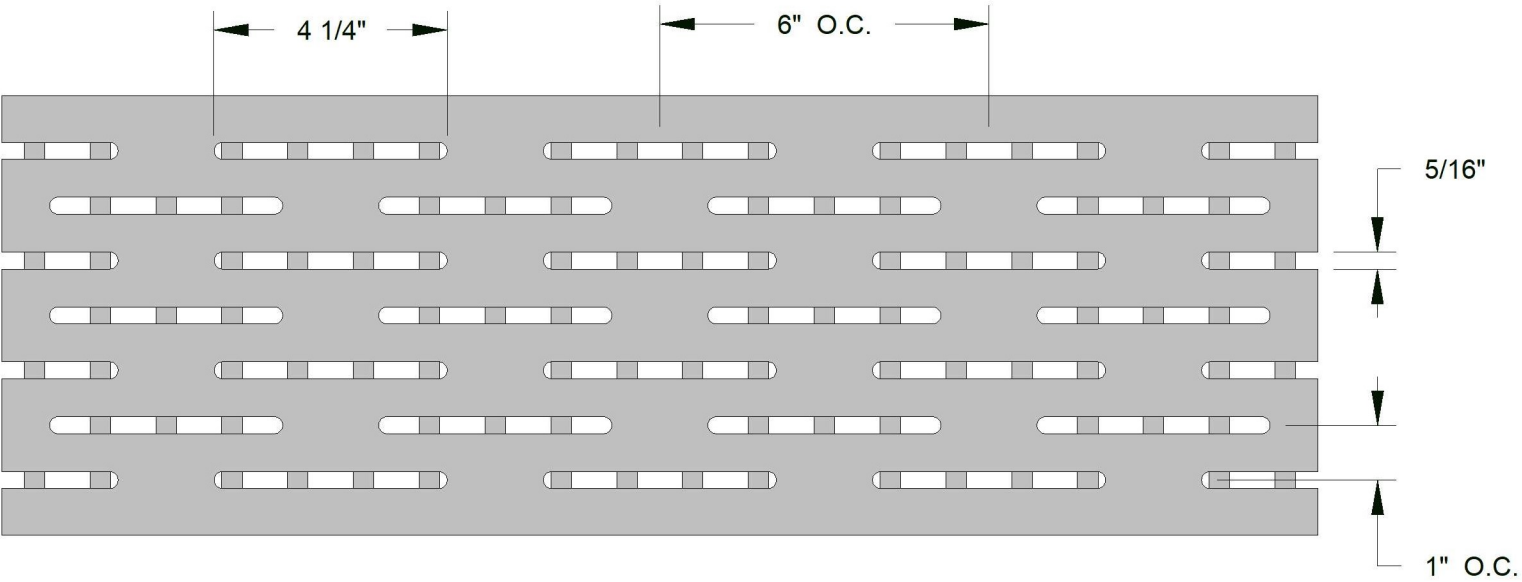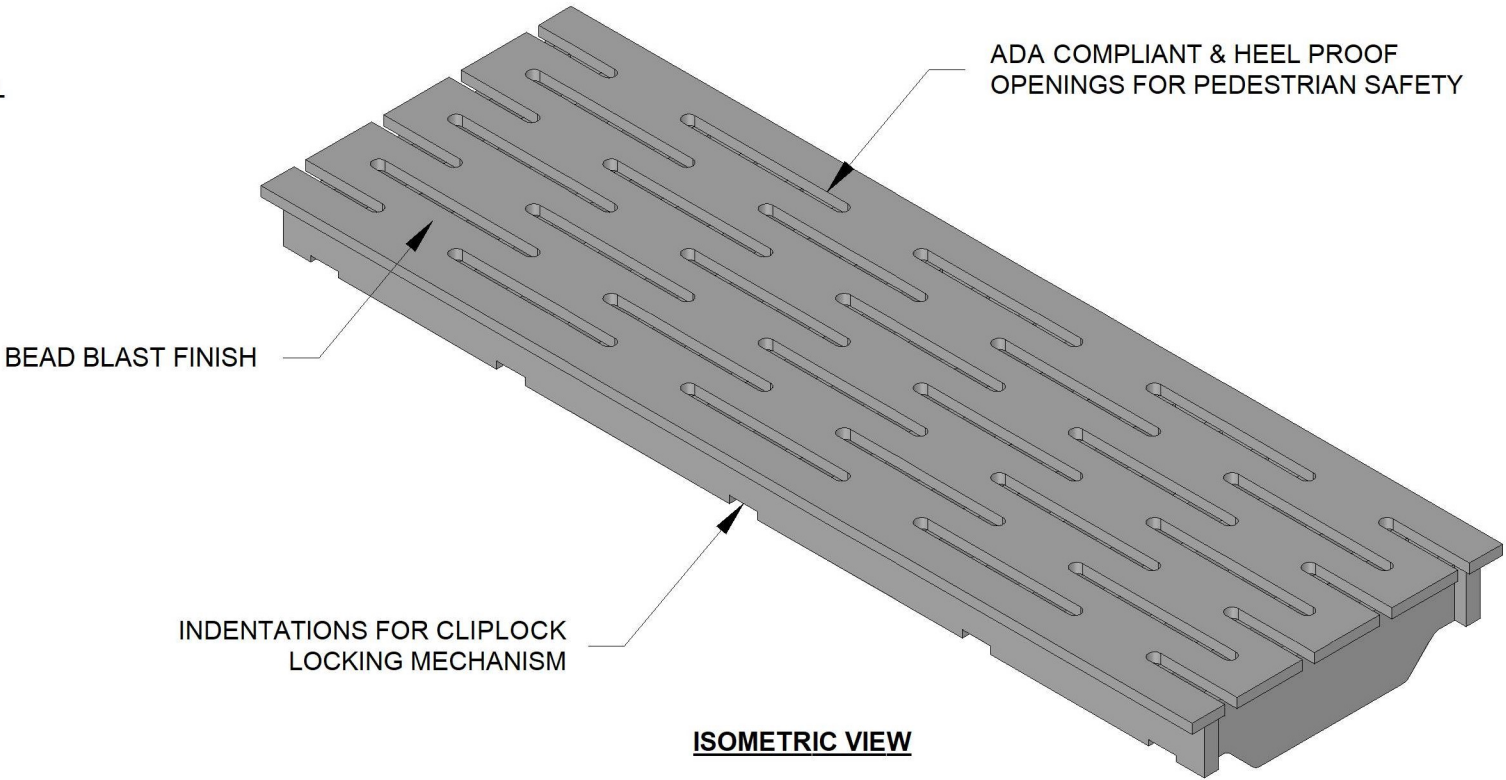

TOP VIEW

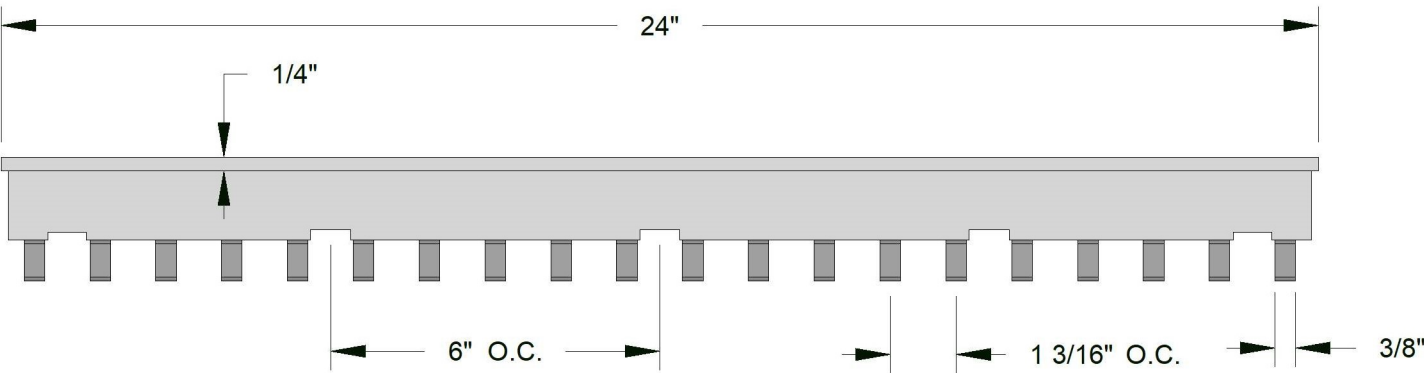

SIDE VIEW

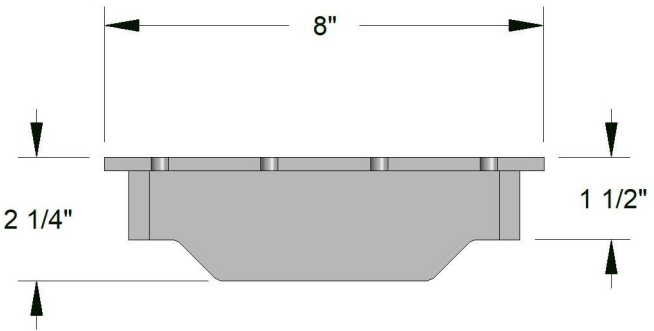

END VIEW

TOLERANCES
.X = ±0.1
.XX = ±0.04
.XXX = ±0.004
FRACTIONAL = ± 1/16"
ANGULAR = ± 0.5°