



SPECIFICATION SHEET  
14SLHF24SSC

DESCRIPTION:  
14" LONGITUDINALLY SLOTTED  
STAINLESS STEEL GRATE

WRITTEN SPECIFICATION:

Grating shall be 14SLHF24SSC, as manufactured by Eric'sons, 296 Industrial Blvd. N., Dallas, GA 30132, (770) 505-6575. Grating shall have ADA compliant and heel proof longitudinal slots. The grate shall be made of grade T304 stainless steel per ASTM A-240. The grate surface shall have a bead blast finish. The grate shall be 14" wide x 24" long x 1 1/2" thick and have a minimum load rating of DIN Class C (exceeds H-20/HS-25).

PRODUCT DATA

MATERIAL:	T304 STAINLESS STEEL
FINISH:	BEAD BLAST
ADA COMPLIANT:	YES
HEEL PROOF:	YES
LOCKING DEVICE:	CLIPLOCK
WEIGHT (LB):	46
OPEN AREA (IN²/LF):	27.5

LOAD RATINGS

DIN / EN1433:	CLASS C
AASHTO:	EXCEEDS M-306, H-20, & HS-25
ASME:	MEDIUM DUTY
FAA:	NO
LOAD CAPACITY:	739 PSI

PHONE: 770-505-6575	MODEL BY:	LRC
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132	DRAWING BY:	EV
	REVIEWED BY:	LRC
222 WEST 33RD ST. OGDEN, UT 84401	DATE:	07/08/2024
13300 RAMBLEWOOD DR. CHESTER, VA 23836	SCALE:	1 : 4
	REV # :	IC-0

WWW.DURATRENCH.COM

NOTES


- GRATES MAY BE MANUFACTURED TO REQUIRED RADII
- ADA COMPLIANCE DEPENDS ON DIRECTION OF TRAVEL

BEAD BLAST FINISH


INDENTATIONS FOR  
CLIPLOCK LOCKING  
MECHANISM

ADA COMPLIANT & HEEL PROOF  
OPENINGS FOR PEDESTRIAN SAFETY


ISOMETRIC VIEW

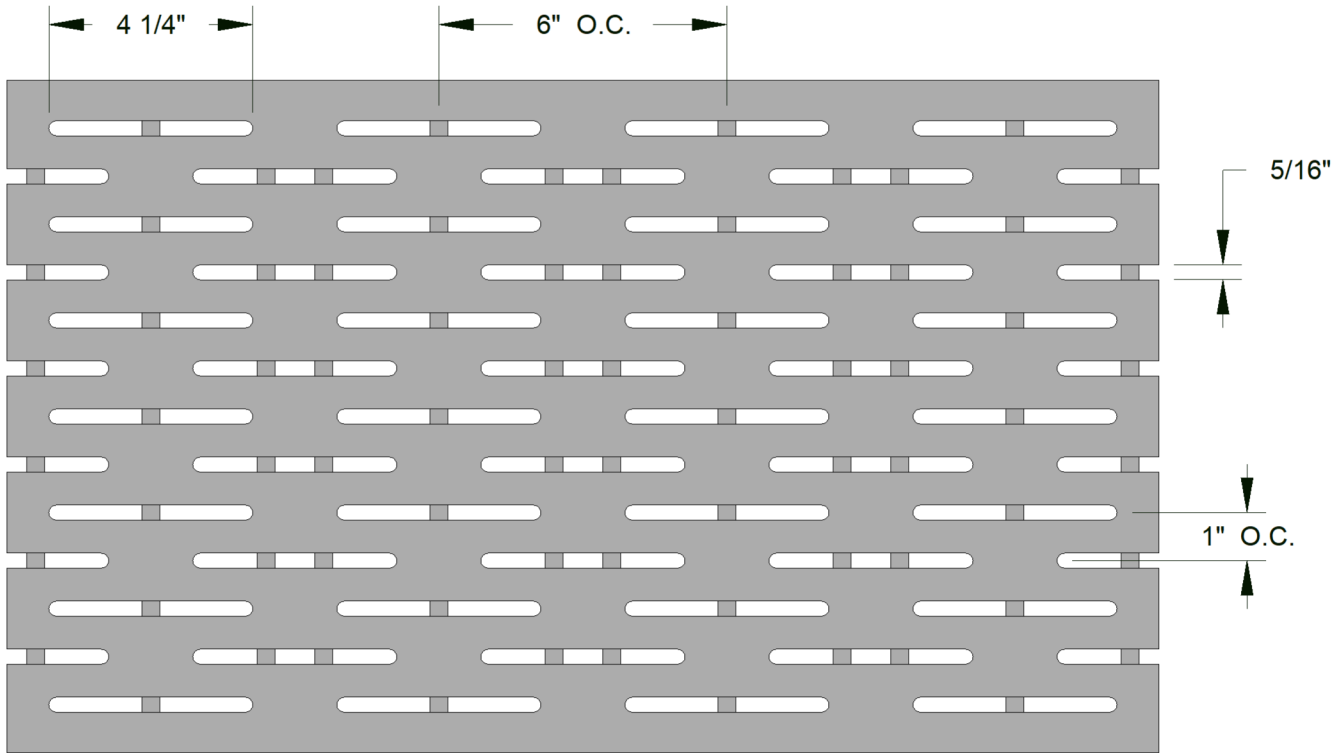

TOP VIEW

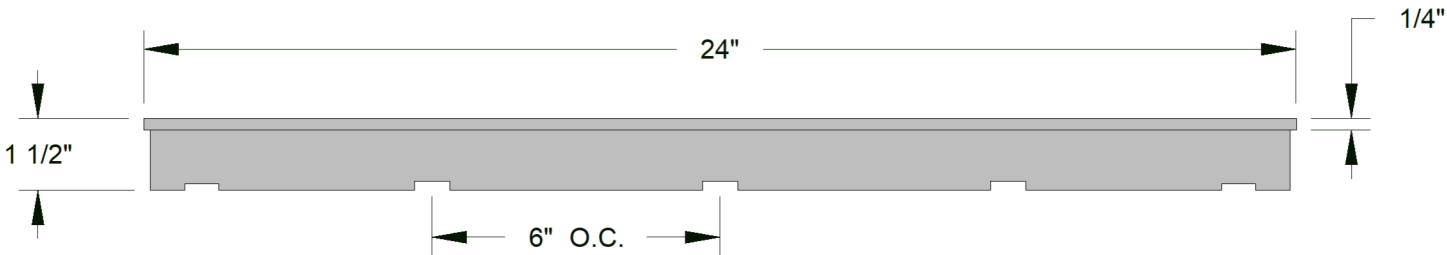

SIDE VIEW

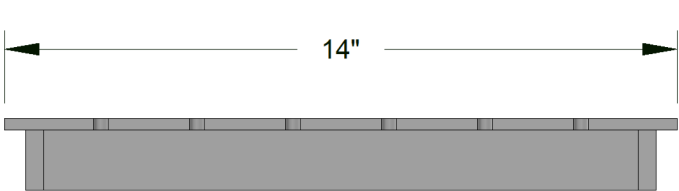

END VIEW

TOLERANCES

.X = ±0.1  
.XX = ±0.04  
.XXX = ±0.004  
FRACTIONAL = ± 1/16"  
ANGULAR = ± 0.5°