

## SPECIFICATION SHEET 20SBAC24DBD

DESCRIPTION:

## 20" DUCTILE IRON SLOTTED GRATE

WRITTEN SPECIFICATION:


Grating shall be 20SBAC24DBD slotted grate. The grate shall be made of grade 80-55-06 cast ductile iron conforming to ASTM A 536-84. The grate shall be E-coated black. The grate shall be 20" wide x 24" long x 1 1/2" thick and have a minimum load rating of DIN Class D (exceeds H-20/HS-25).

<u>PI</u>	RODUCT	<u>DATA</u>	
MATERIAL:	DUCTILE IRON 80-55-06		
FINISH:	BLACK E-COATED		
ADA COMPLIANT:	YES		
HEEL PROOF:	NO		
LOCKING DEVICE:	CLIPLOCK		
WEIGHT (LB):	83.3		
OPEN AREA (IN²/LF):	80.7		
<u>L</u> (	OAD RA	<u>TINGS</u>	
DIN / EN1433:	CLASS D		
AASHTO:	EXCEEDS M-306, H-20 & HS-25		
ASME:	EXTRA HEAVY DUTY		
FAA:	NO		
LOAD CAPACITY:	1,182 PSI		
PHONE: 770-505-6575		MODEL BY:	JDP
296 INDUSTRIAL BLV	D. N.	DRAWING BY:	EV
DALLAS, GA 3013	2	REVIEWED BY:	JDP
222 WEST 33RD ST. OGDEN, UT 84401		DATE:	07/01/2025
13300 RAMBLEWOOL	DR.	SCALE:	1:5.5
CHESTER, VA 23836		REV#:	1


WWW.DURATRENCH.COM

## **NOTES**


- 1. GRATES MAY BE MANUFACTURED TO REQUIRED RADII
- 2. ADA COMPLIANCE DEPENDENT UPON DIRECTION OF TRAVEL

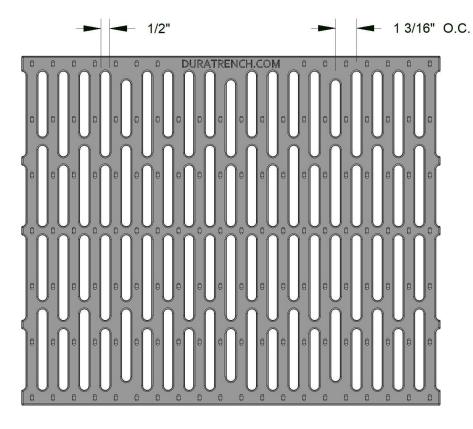


**TOP VIEW** 

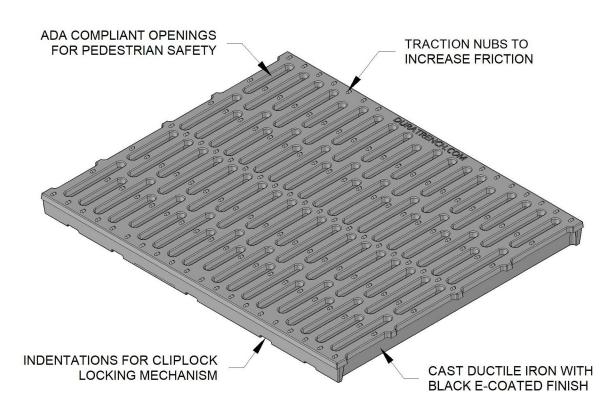

**ISOMETRIC VIEW** 

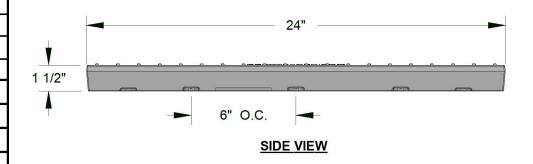



**END VIEW** 

TOLERANCES

FRACTIONAL =  $\pm$  1/8"

ANGULAR =  $\pm$  1°