



SPECIFICATION SHEET
26SGLR24MG4

DESCRIPTION: 26" WIDE GALVANIZED STEEL
BAR GRATE

WRITTEN SPECIFICATION:

Grating shall be 26SGLR24MG4 bar grating. Grates shall be load banded. Grate shall be post fabricated hot dipped galvanized per ASTM A-123. The grate shall be 26" wide x 24 1/8" long x 1 1/2" thick with 3/8" thk. bearing bars at 1 3/16" o.c. and 4" o.c. cross bars. Grates shall have a minimum load rating of DIN Class C (exceeds H-20/HS-25).

PRODUCT DATA


MATERIAL:	STEEL A36 AND/OR 1018
FINISH:	HOT DIP GALVANIZED
ADA COMPLIANT:	NO
HEEL PROOF:	NO
LOCKING DEVICE:	SADDLE CLIP
WEIGHT (LB):	90.4
OPEN AREA (IN²/LF):	196.0

LOAD RATINGS


DIN / EN1433:	CLASS C
AASHTO:	EXCEEDS M-306, H-20, & HS-25
ASME:	MEDIUM DUTY
FAA:	NO
LOAD CAPACITY:	739 PSI

PHONE: 770-505-6575	MODEL BY:	KM
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132	DRAWING BY:	EV
	REVIEWED BY:	JDP
222 WEST 33RD ST. OGDEN, UT 84401	DATE:	12/20/2024
13300 RAMBLEWOOD DR. CHESTER, VA 23836	SCALE:	1 : 6
	REV # :	IC-0


WWW.DURATRENCH.COM

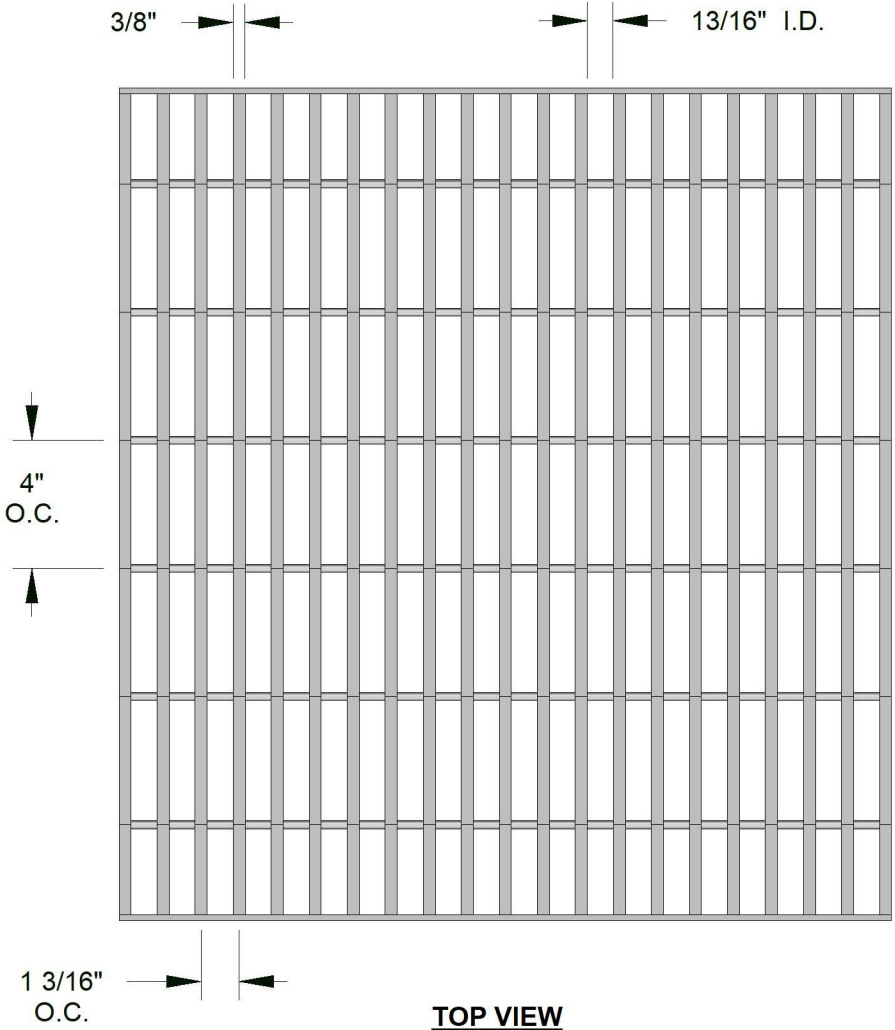


TOP VIEW

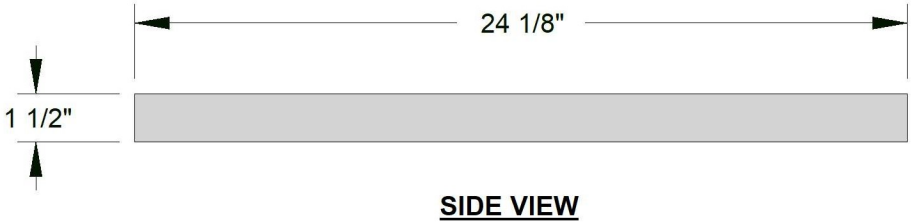

SIDE VIEW

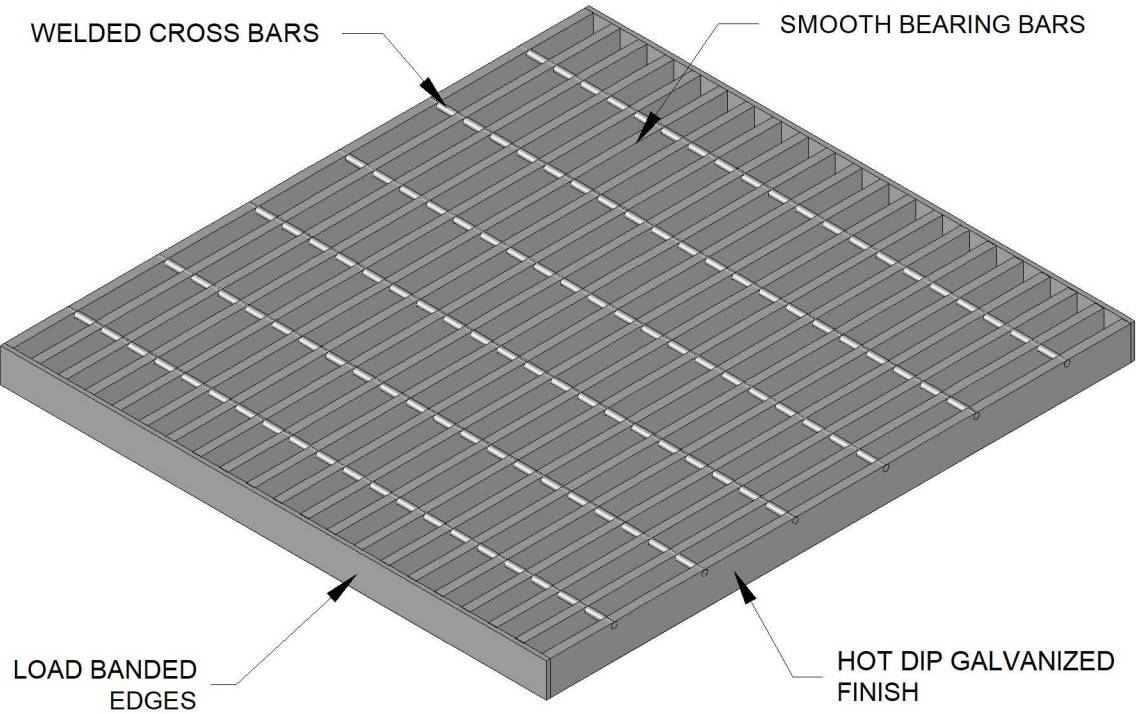

ISOMETRIC VIEW

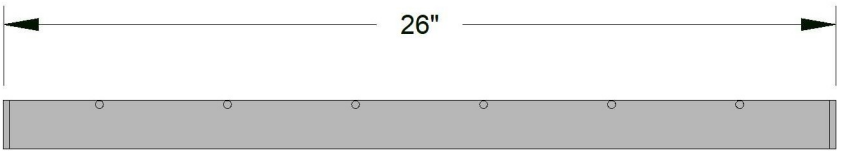

END VIEW

TOLERANCES

.X = ±0.1
.XX = ±0.04
.XXX = ±0.004
FRACTIONAL = ± 1/16"
ANGULAR = ± 0.5°