



SPECIFICATION SHEET  
26SGLR24SS3

DESCRIPTION: 26" WIDE STAINLESS STEEL  
BAR GRATE

WRITTEN SPECIFICATION:

Grating shall be 26SGLR24SS3 bar grating. Grates shall be load banded. Grate shall be fabricated from T304 stainless steel per ASTM-A240 with bead blast finish. The grate shall be 26" wide x 24" long x 1 1/2" thick with 1/4" thk. bearing bars at 1 3/16" o.c. and 4" o.c. cross bars. Grates shall have a minimum load rating of DIN Class B (exceeds H-20).

PRODUCT DATA



MATERIAL:	T304 STAINLESS STEEL
FINISH:	BEAD BLAST
ADA COMPLIANT:	NO
HEEL PROOF:	NO
LOCKING DEVICE:	SADDLE CLIP
WEIGHT (LB):	63.8
OPEN AREA (IN²/LF):	226.2

LOAD RATINGS

DIN / EN1433:	CLASS B
AASHTO:	EXCEEDS H-20
ASME:	LIGHT DUTY
FAA:	NO
LOAD CAPACITY:	369 PSI

PHONE: 770-505-6575	MODEL BY: EV
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132  222 WEST 33RD ST. OGDEN, UT 84401  13300 RAMBLEWOOD DR. CHESTER, VA 23836	DRAWING BY: EV
	REVIEWED BY: JDP
	DATE: 02/21/2025
	SCALE: 1 : 6
	REV # : IC-0


WWW.DURATRENCH.COM

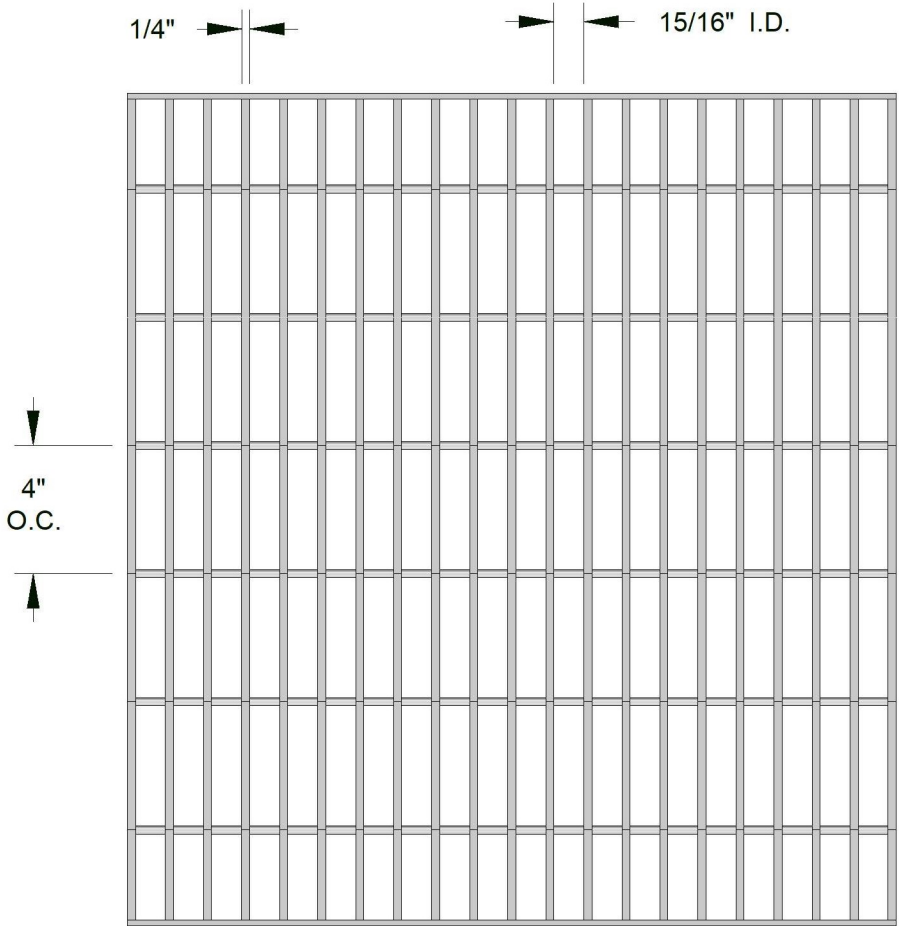


TOP VIEW



SIDE VIEW

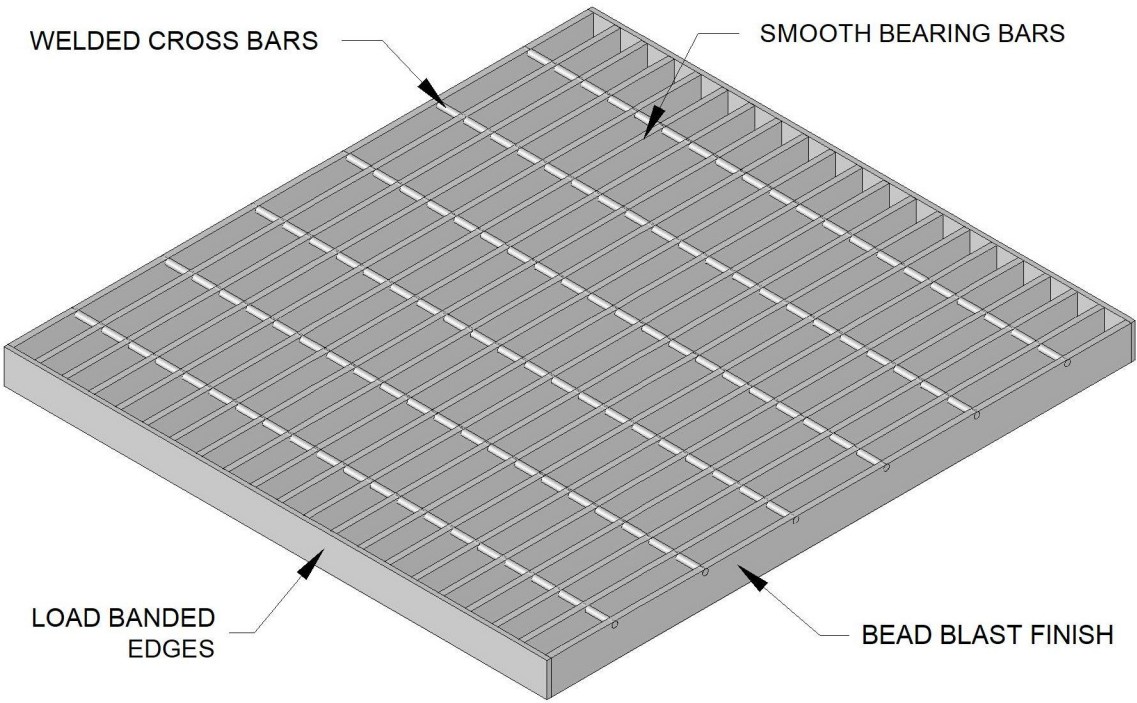

ISOMETRIC VIEW

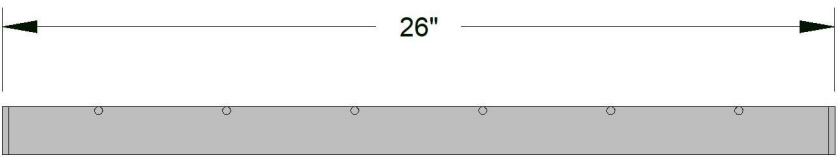

END VIEW

TOLERANCES  
FRACTIONAL = ± 1/8"  
ANGULAR = ± 1°