



SPECIFICATION SHEET
38SGLR24MG2

DESCRIPTION: 38" WIDE GALVANIZED STEEL
BAR GRATE

WRITTEN SPECIFICATION:

Grating shall be 38SGLR24MG2 bar grating.
Grates shall be load banded. Grate shall be
post fabricated hot dipped galvanized per
ASTM A-123. The grate shall be 38" wide x 23
15/16" long x 1 1/2" thick with 3/16" thk.
bearing bars at 1 3/16" o.c. and 4" o.c. cross
bars. Grates shall have a minimum load rating
of DIN Class A.

PRODUCT DATA


MATERIAL:	STEEL A36 AND/OR 1018
FINISH:	HOT DIP GALVANIZED
ADA COMPLIANT:	NO
HEEL PROOF:	NO
LOCKING DEVICE:	SADDLE CLIP
WEIGHT (LB):	69.6
OPEN AREA (IN²/LF)	351.2

LOAD RATINGS

DIN / EN1433:	CLASS A
AASHTO:	NO
ASME:	NO
FAA:	NO
LOAD CAPACITY:	44 PSI

PHONE: 770-505-6575	MODEL BY: KM
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132 222 WEST 33RD ST. OGDEN, UT 84401 13300 RAMBLEWOOD DR. CHESTER, VA 23836	DRAWING BY: KM
	REVIEWED BY: JDP
	DATE: 02/20/2025
	SCALE: 1 : 7
	REV # : IC-0

WWW.DURATRENCH.COM

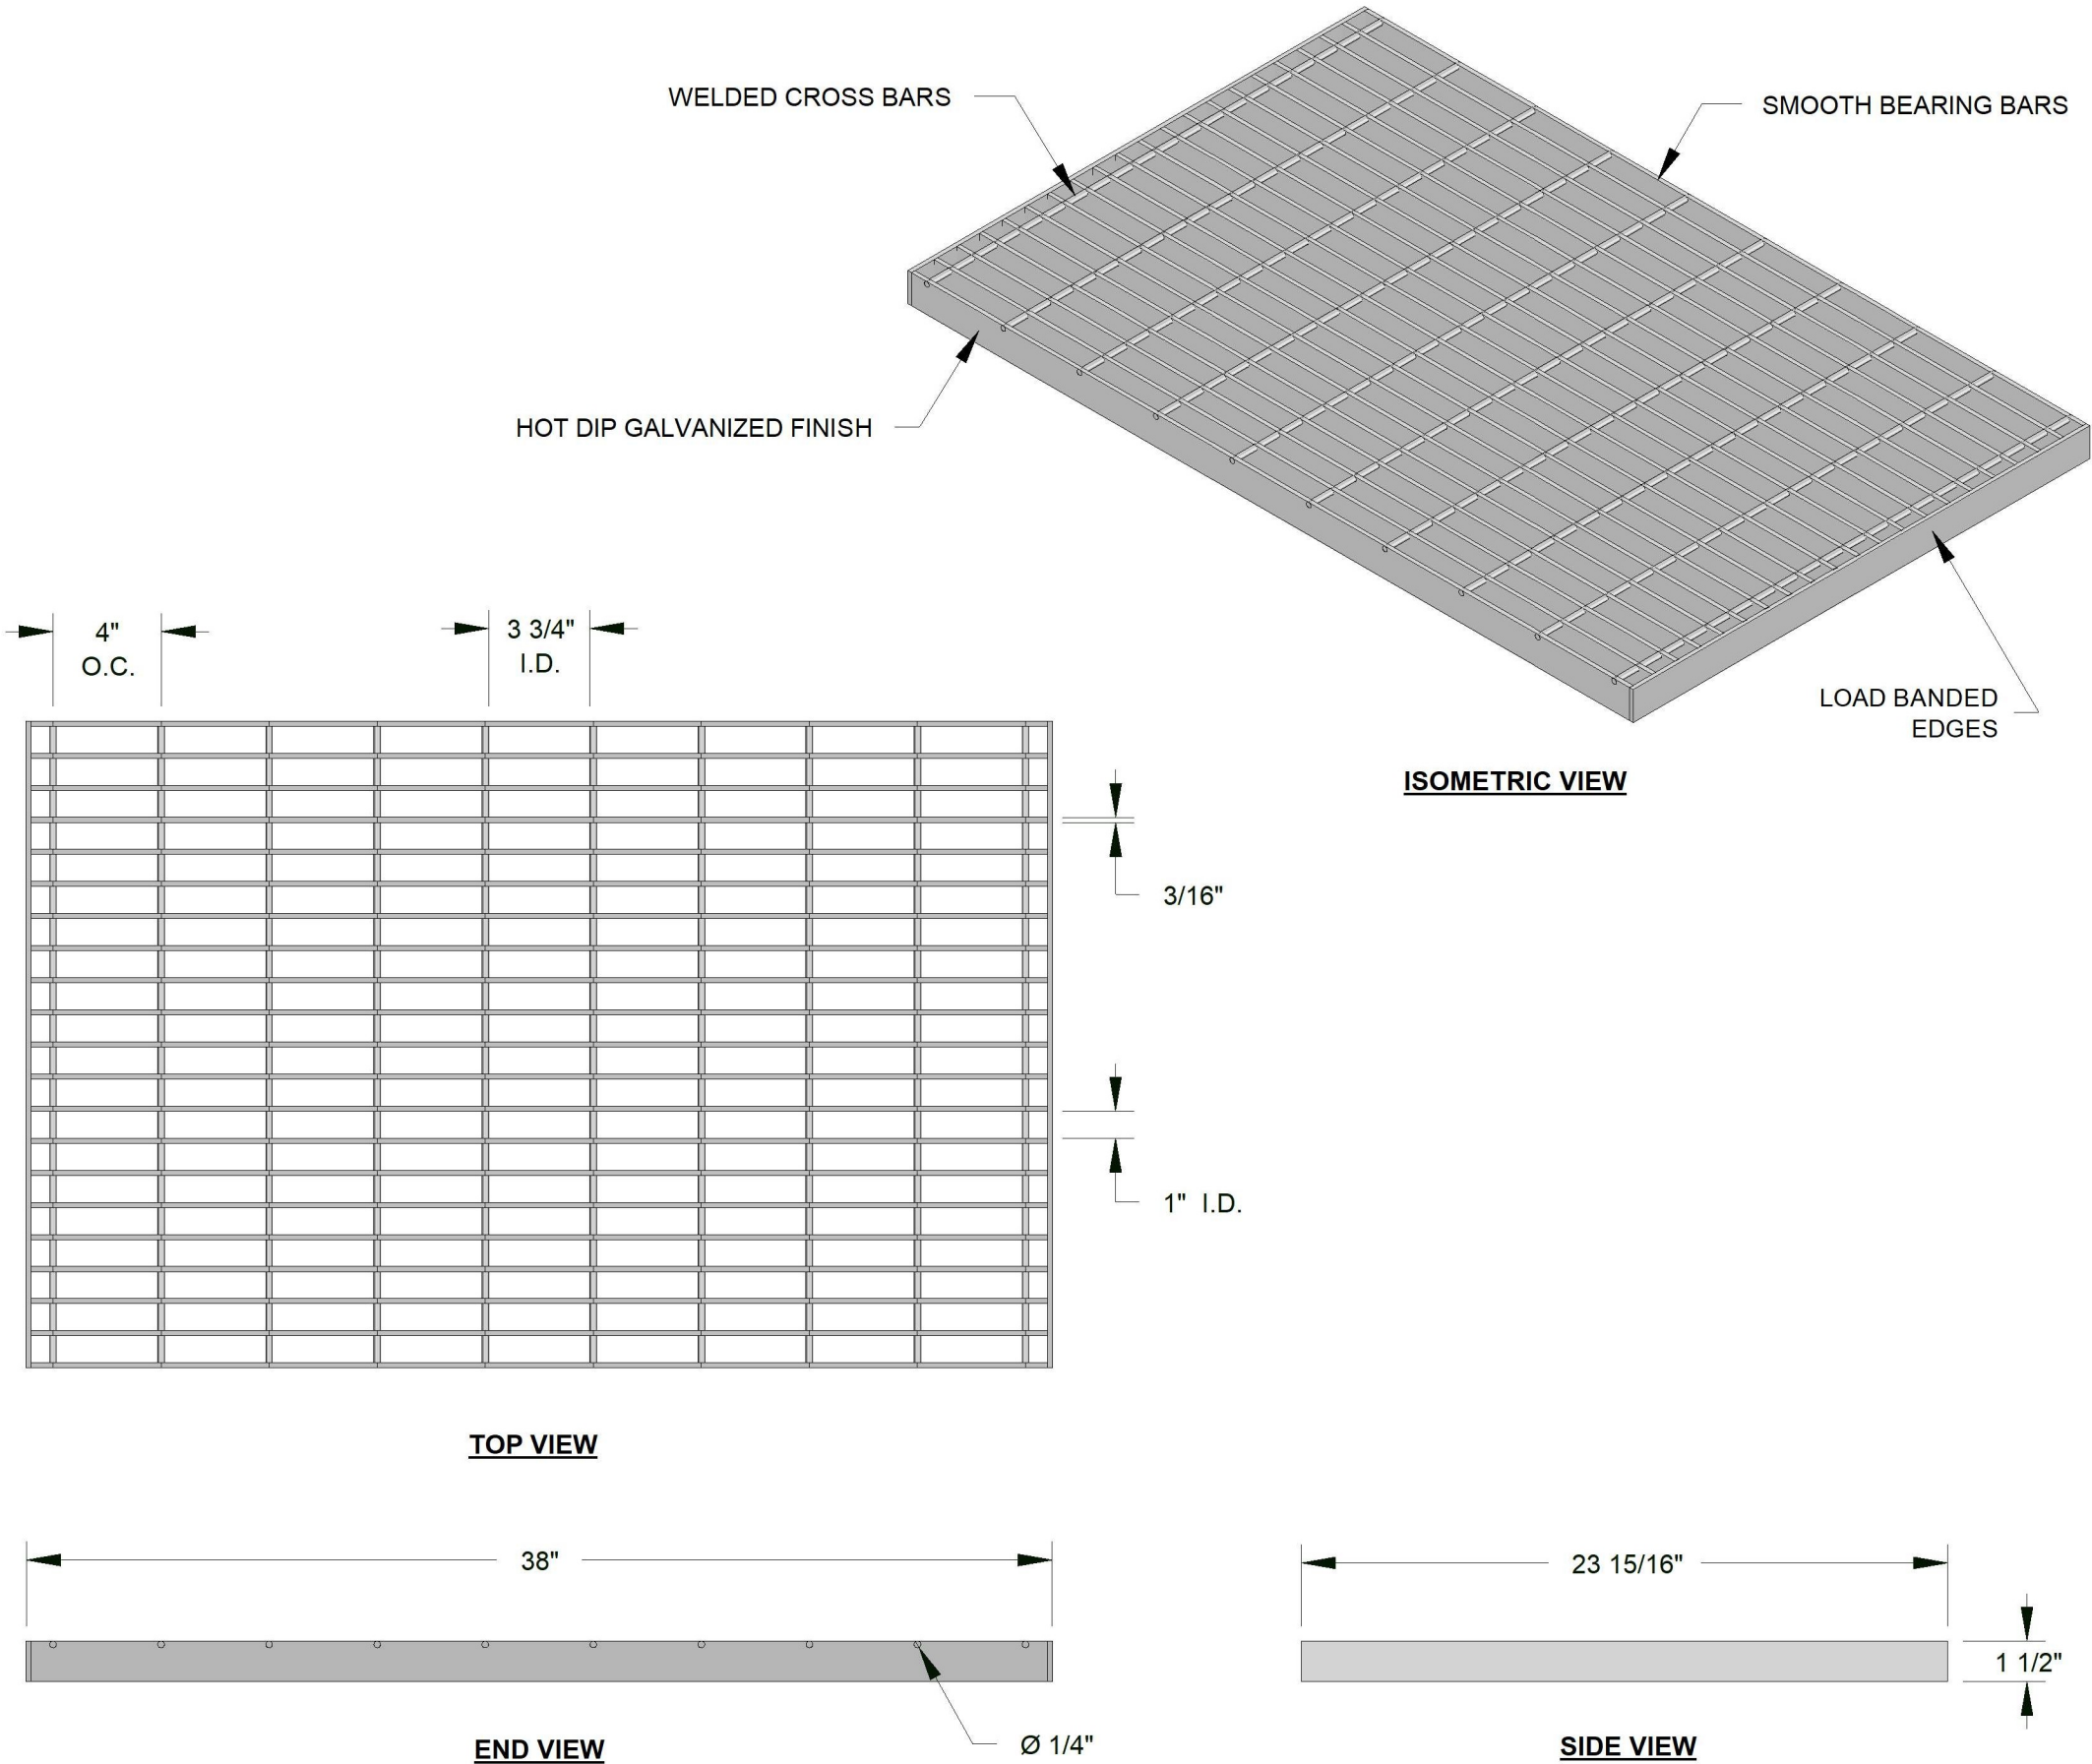

TOLERANCES
FRACTIONAL = ± 1/8"
ANGULAR = ± 1°