



SPECIFICATION SHEET  
14SBAC24DBD

DESCRIPTION:  
  
14" WIDE SLOTTED GRATE

WRITTEN SPECIFICATION:

Grating shall be 14SBAC24DBD ADA compliant slotted grate. The grate shall be made of grade 80-55-06 cast ductile iron conforming to ASTM A 536-84. The grate shall be E-coated black. The grate shall be 14" wide x 24" long x 1.5" thick and have a minimum load rating of DIN Class D (exceeds H-20/HS-25).

PRODUCT DATA

MATERIAL:	DUCTILE IRON 80-55-06
FINISH:	E-COATED BLACK
ADA COMPLIANT:	YES
HEEL PROOF:	NO
LOCKING DEVICE:	CLIPLOCK
WEIGHT (LB):	47.3
OPEN AREA (IN²/LF):	51


LOAD RATINGS

DIN / EN1433:	DIN CLASS D
AASHTO:	EXCEEDS H-20. M-306, HS-25
ASME:	EXTRA HEAVY DUTY
FAA:	NO
LOAD CAPACITY:	1,182 PSI

PHONE: 770-505-6575	MODEL BY: JDP
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132	DRAWING BY: KM
	REVIEWED BY: JDP
222 WEST 33RD ST. OGDEN, UT 84401	DATE: 06/02/2025
13300 RAMBLEWOOD DR. CHESTER, VA 23836	SCALE: 1 : 4
	REV # : 3

WWW.DURATRENCH.COM

- NOTES
- GRATES MAY BE MANUFACTURED TO REQUIRED RADII
  - ADA COMPLIANCE DEPENDENT UPON DIRECTION OF TRAVEL

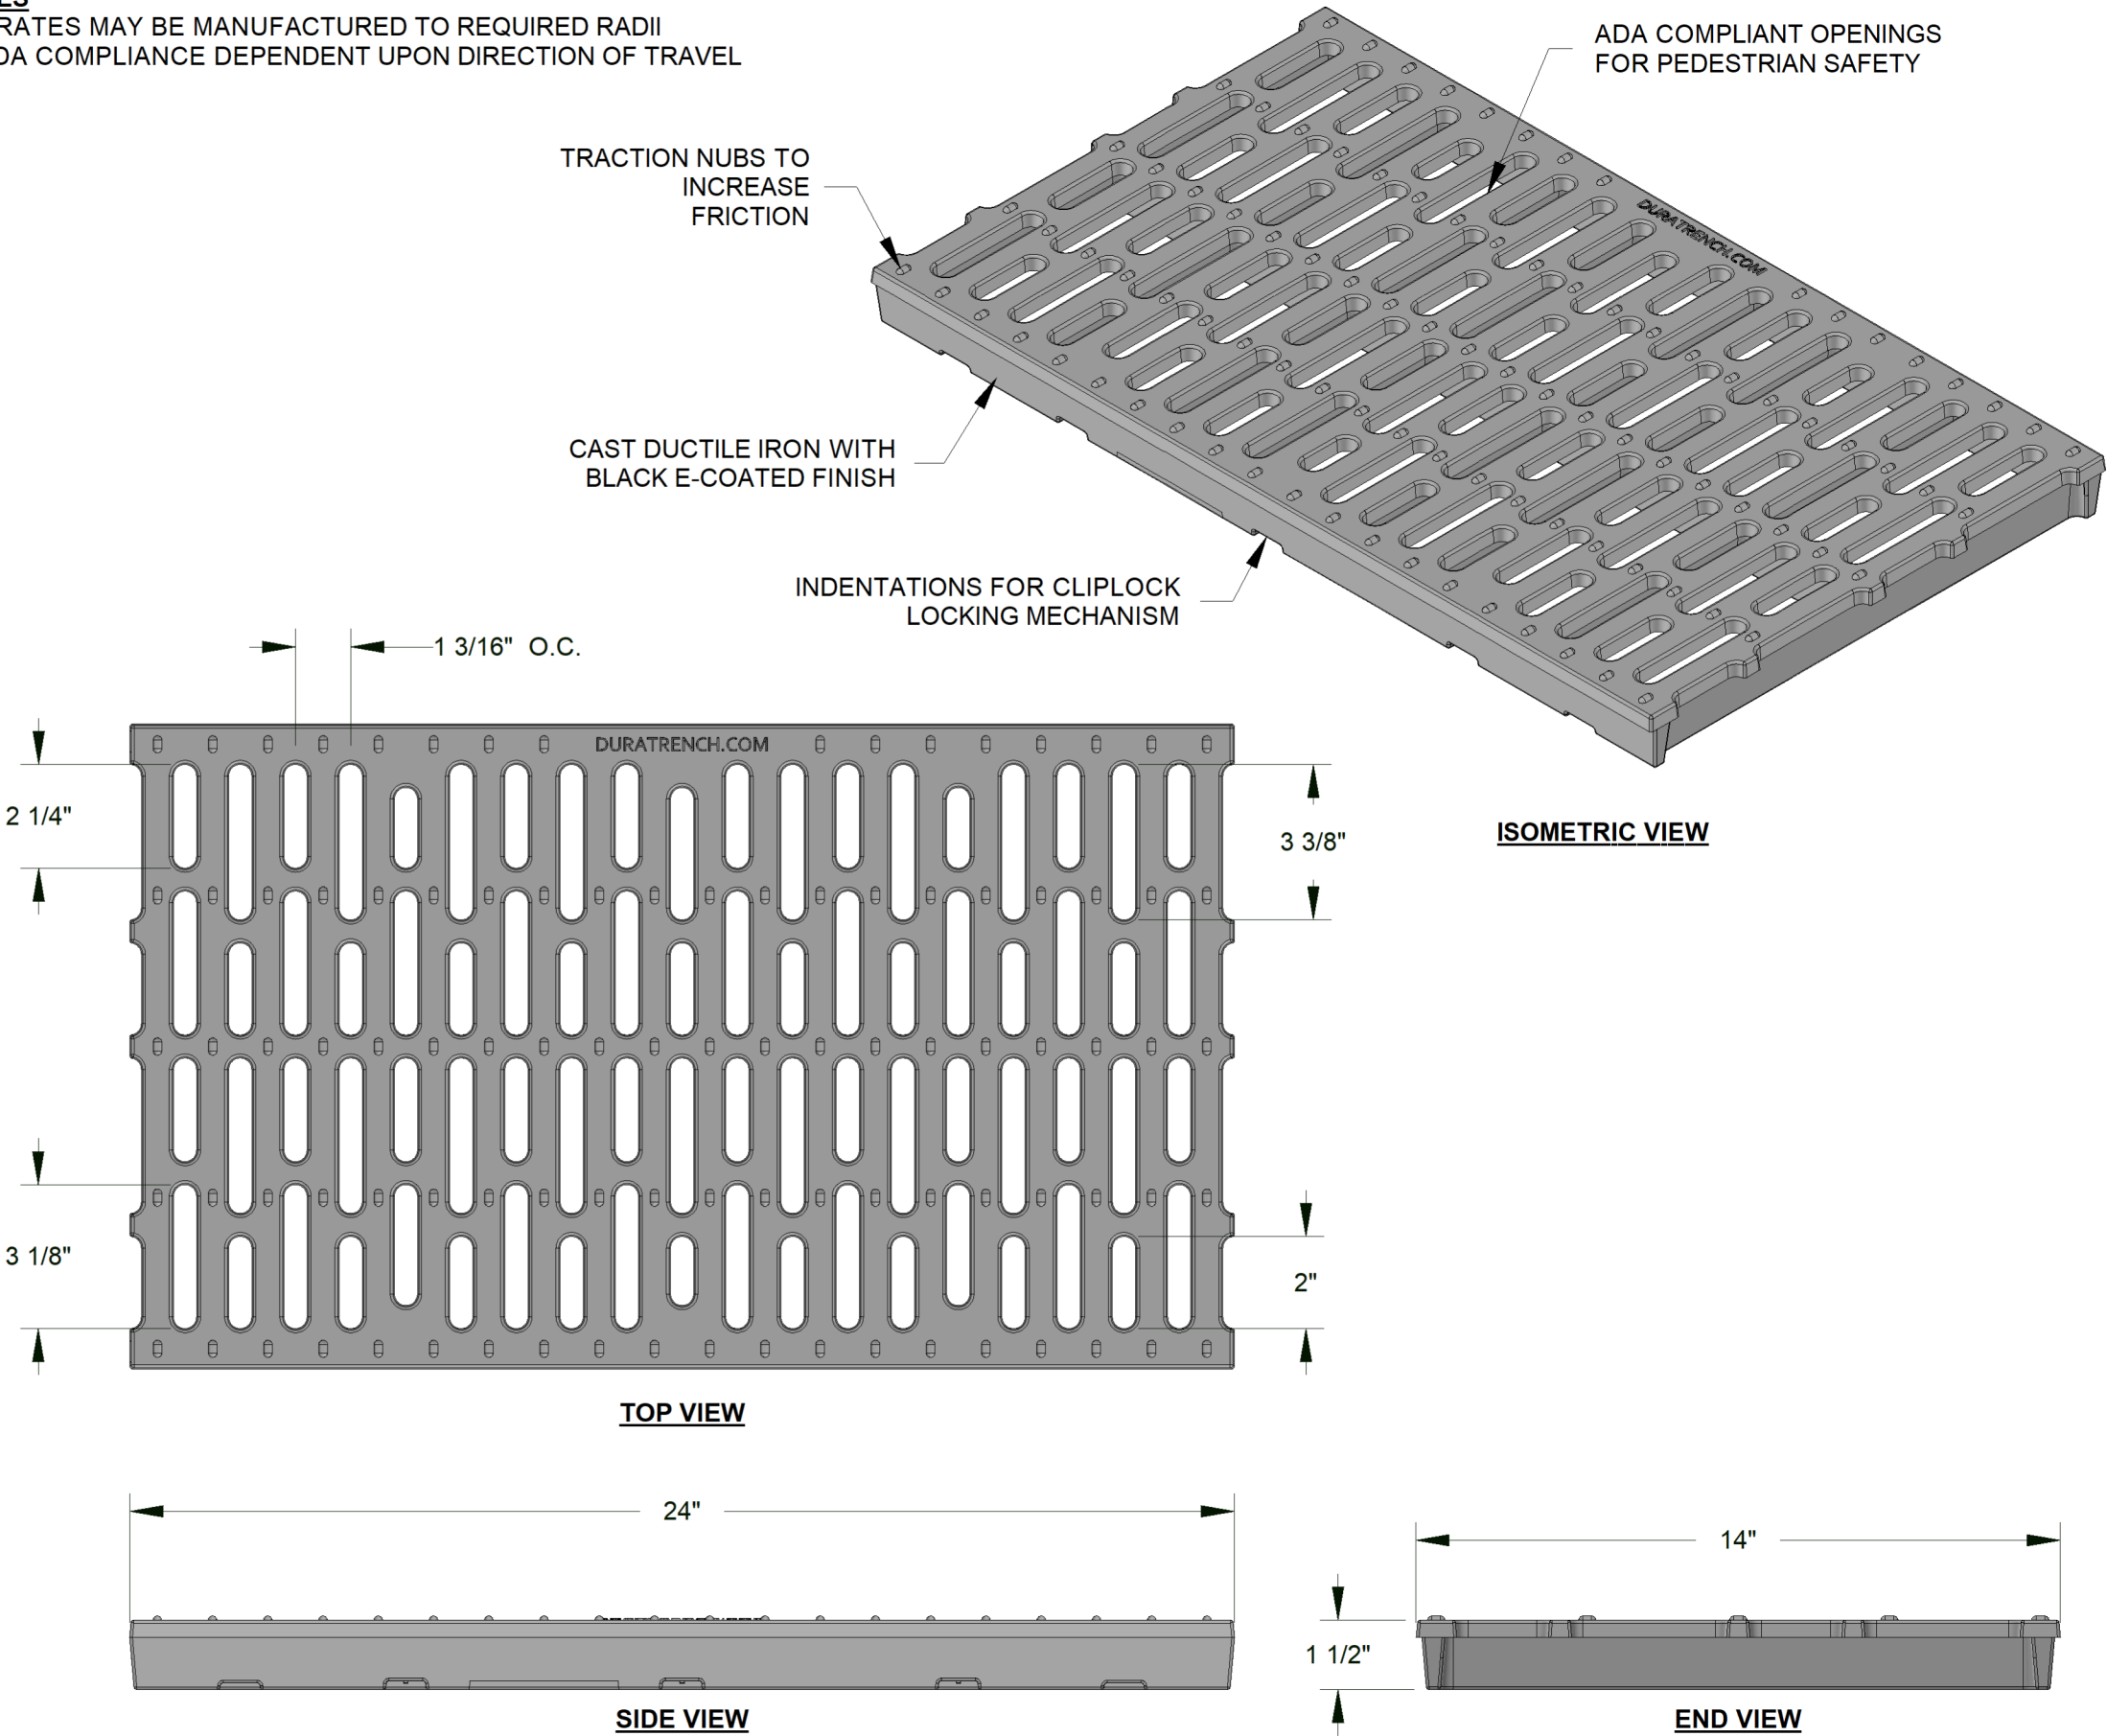

TOLERANCES  
FRACTIONAL = ± 1/8"  
ANGULAR = ± 1°