



SPECIFICATION SHEET
08SBHF24SSC

DESCRIPTION:

8" STAINLESS STEEL SLOTTED GRATE

WRITTEN SPECIFICATION:

Grating shall be 08SBHF24SSC slotted grate.
The grate shall be made of T304 stainless steel. The grate shall have a bead blast finish.
The grate shall be 8" wide x 24" long x 1 1/2" thick and have a minimum load rating of DIN Class C (Exceeds H-20/HS-25).

PRODUCT DATA

| | |
|---------------------|----------------------|
| MATERIAL: | T304 STAINLESS STEEL |
| FINISH: | BEAD BLAST |
| ADA COMPLIANT: | YES |
| HEEL PROOF: | YES |
| LOCKING DEVICE: | CLIPLOCK |
| WEIGHT (LB): | 24.5 |
| OPEN AREA (IN²/LF): | 17.9 |

LOAD RATINGS


| | |
|----------------|------------------------------|
| DIN / EN1433: | CLASS C |
| AASHTO: | EXCEEDS M-306, H-20, & HS-25 |
| ASME: | MEDIUM DUTY |
| FAA: | NO |
| LOAD CAPACITY: | 1,179 PSI |

| | | |
|---|--------------|------------|
| PHONE: 770-505-6575 | MODEL BY: | LRC |
| 296 INDUSTRIAL BLVD. N. DALLAS, GA 30132 | DRAWING BY: | EV |
| | REVIEWED BY: | LRC |
| 222 WEST 33RD ST. OGDEN, UT 84401 | DATE: | 07/12/2024 |
| 13300 RAMBLEWOOD DR. CHESTER, VA 23836 | SCALE: | 1 : 3.5 |
| | REV # : | IC-0 |


WWW.DURATRENCH.COM

NOTES


1. GRATES MAY BE MANUFACTURED TO REQUIRED RADII
2. ADA COMPLIANCE DEPENDS ON DIRECTION OF TRAVEL

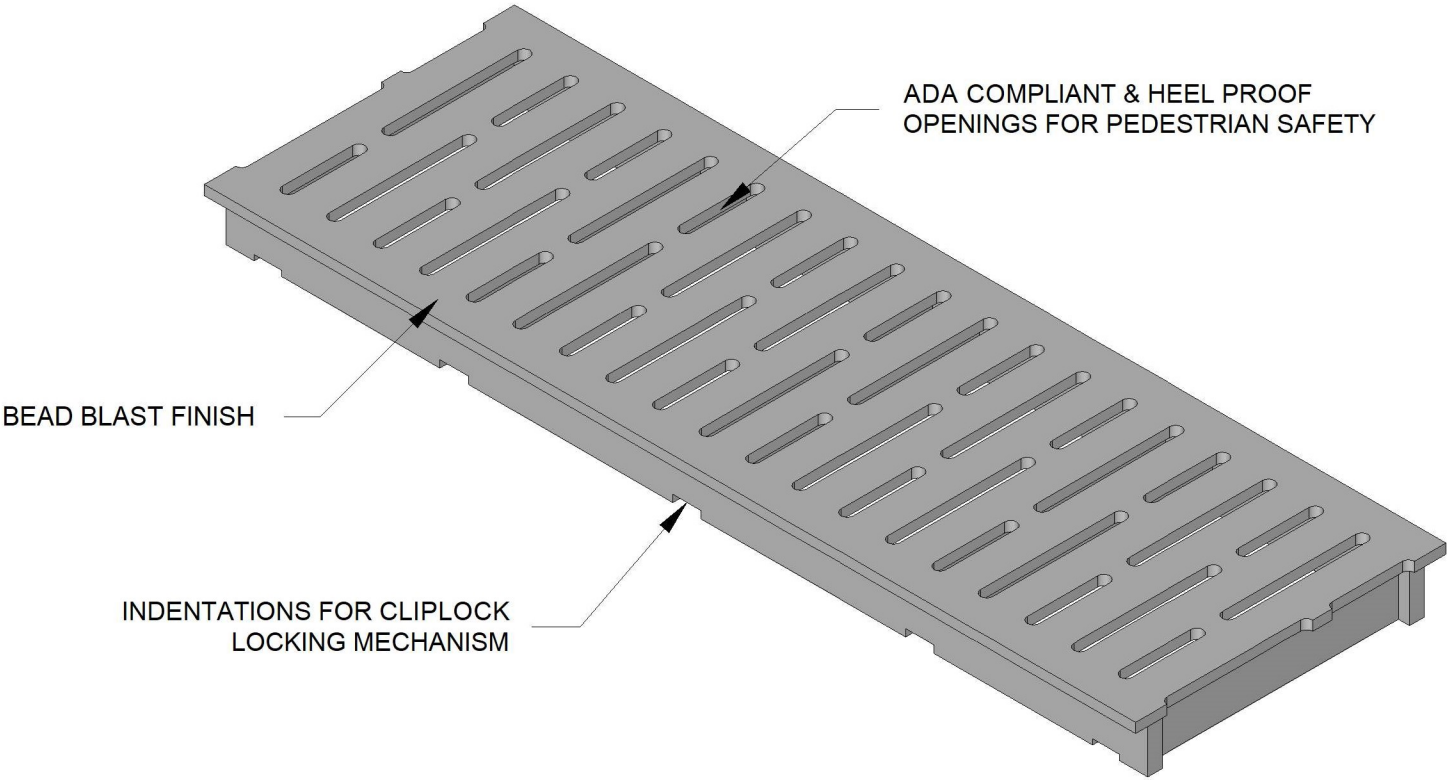


ISOMETRIC VIEW

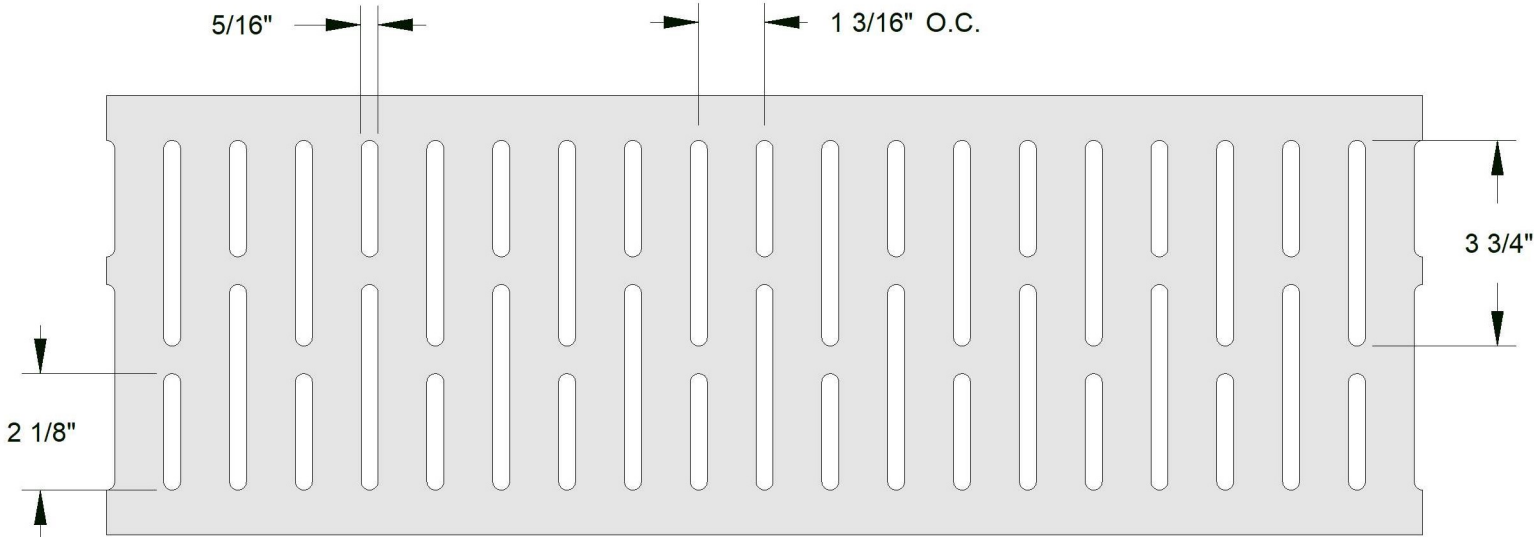

TOP VIEW

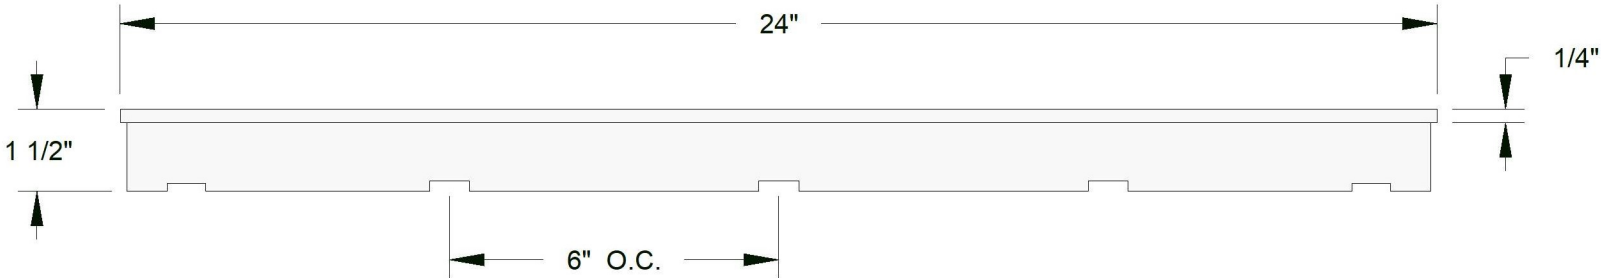

SIDE VIEW

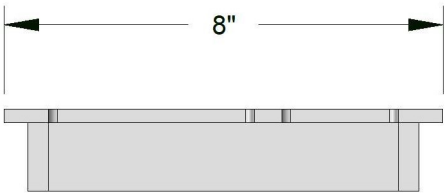

END VIEW

TOLERANCES

.X = ±0.1
.XX = ±0.04
.XXX = ±0.004
FRACTIONAL = ± 1/16"
ANGULAR = ± 0.5°