







SPECIFICATION SHEET
10SLHF24SSC

DESCRIPTION: **10" LONGITUDINALLY SLOTTED**
STAINLESS STEEL GRATE

WRITTEN SPECIFICATION:

Grating shall be 10SLHF24SSC, as manufactured by Eric'sons, 296 Industrial Blvd. N., Dallas, GA 30132, (770) 505-6575. Grating shall have ADA compliant and heel proof longitudinal slots. The grate shall be made of grade T304 stainless steel per ASTM A-240. The grate surface shall have a bead blast finish. The grate shall be 10" wide x 24" long x 1 1/2" thick and have a minimum load rating of DIN Class C (exceeds H-20/HS-25).

- NOTES**
- 1. GRATES MAY BE MANUFACTURED TO REQUIRED RADII
 - 2. ADA COMPLIANCE DEPENDS ON DIRECTION OF TRAVEL

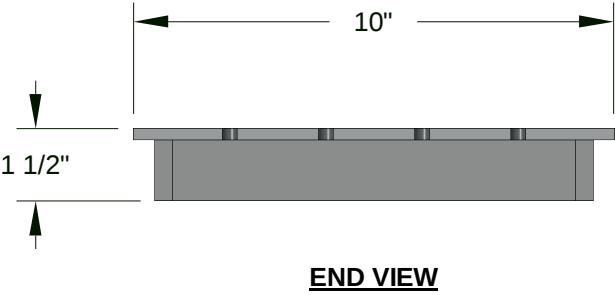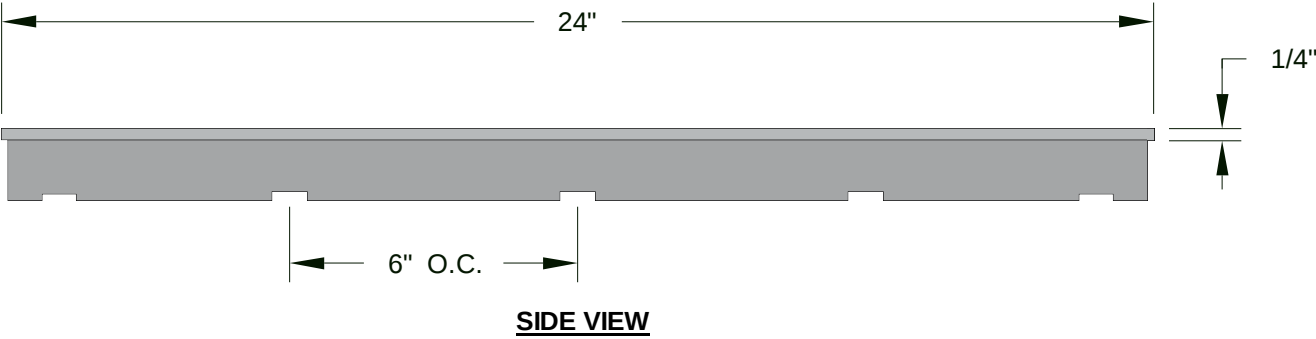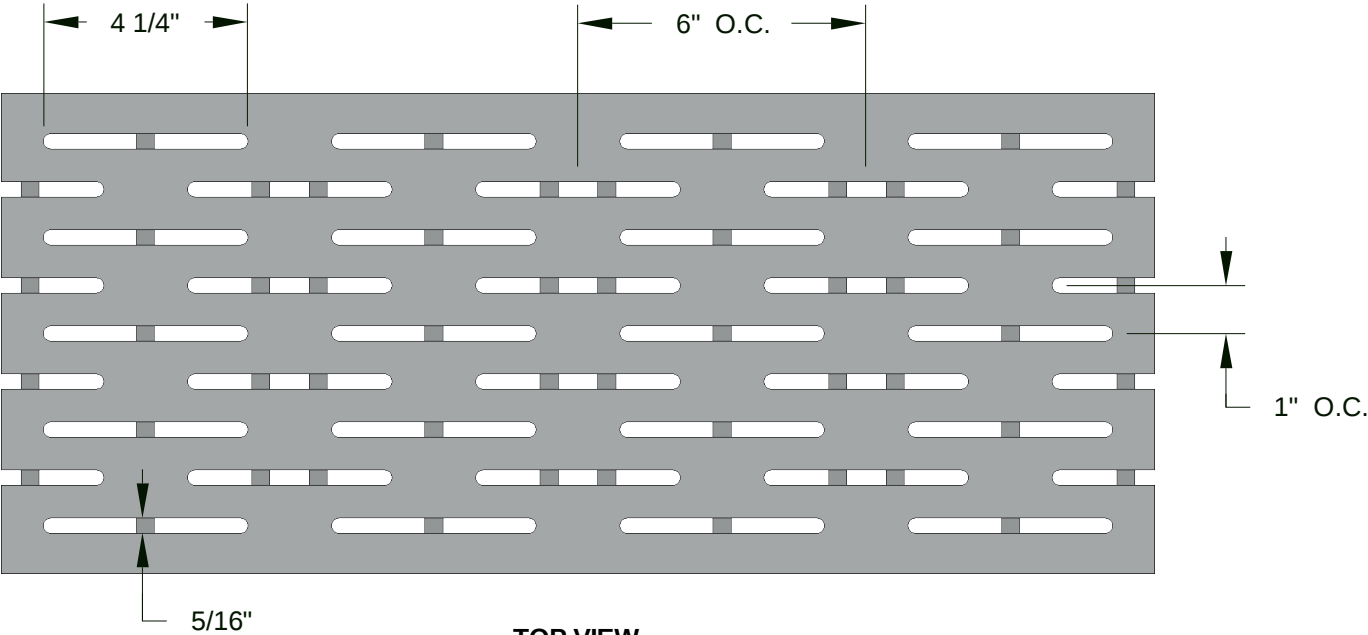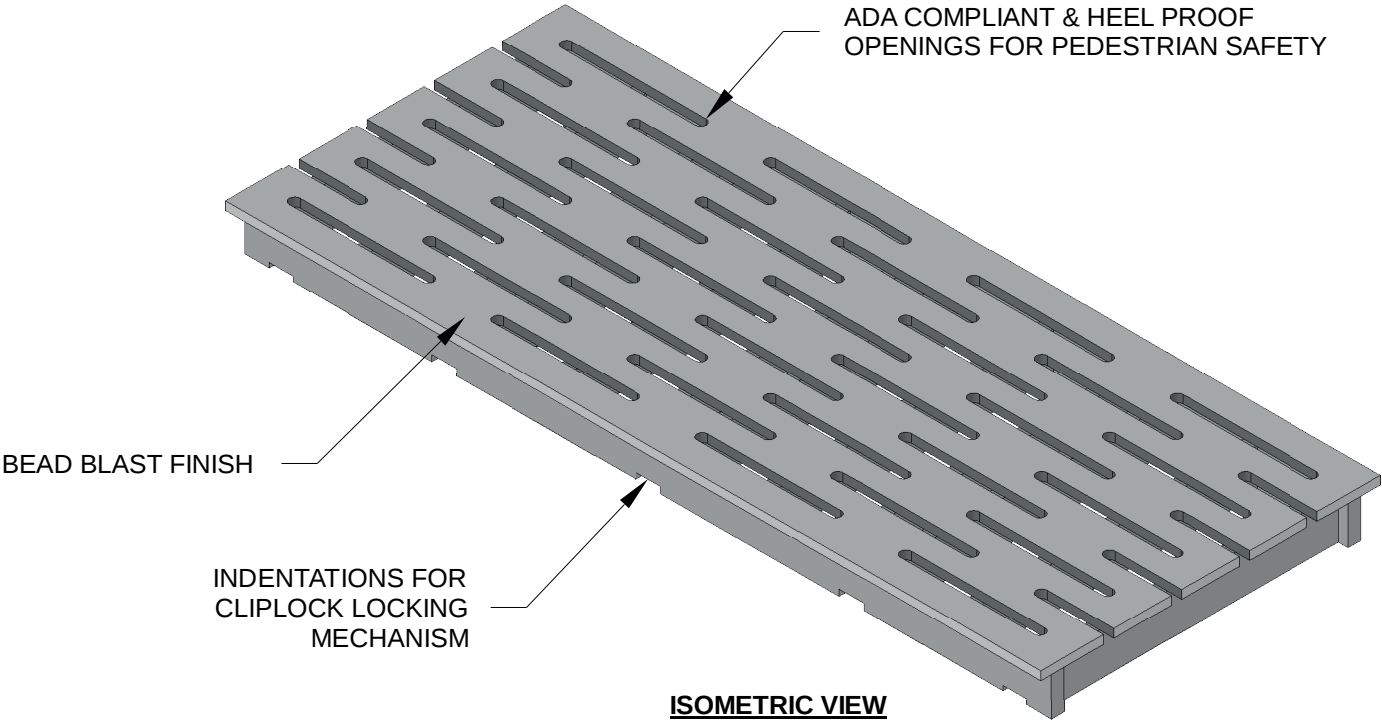

PRODUCT DATA		
MATERIAL:	T304 STAINLESS STEEL	
FINISH:	BEAD BLAST	
ADA COMPLIANT:	YES	
HEEL PROOF:	YES	
LOCKING DEVICE:	CLIPLOCK	
WEIGHT (LB):	33.8	
OPEN AREA (IN²/LF):	20.5	
LOAD RATINGS		
DIN / EN1433:	CLASS C	
AASHTO:	EXCEEDS M-306, H-20, & HS-25	
ASME:	MEDIUM DUTY	
FAA:	NO	
LOAD CAPACITY:	786 PSI	
PHONE: 770-505-6575		MODEL BY: LRC
296 INDUSTRIAL BLVD. N. DALLAS, GA 30132 222 WEST 33RD ST. OGDEN, UT 84401 13300 RAMBLEWOOD DR. CHESTER, VA 23836		DRAWING BY: EV
		REVIEWED BY: LRC
		DATE: 07/24/2024
		SCALE: 1 : 4
		REV # : IC-0

WWW.DURATRENCH.COM

TOLERANCES
.X = ±0.1
.XX = ±0.04
.XXX = ±0.004
FRACTIONAL = ± 1/16"
ANGULAR = ± 0.5°